




**VIEW WIRELESS**

CATALOGUE ENGLISH

**VIEW**   
IoT smart life



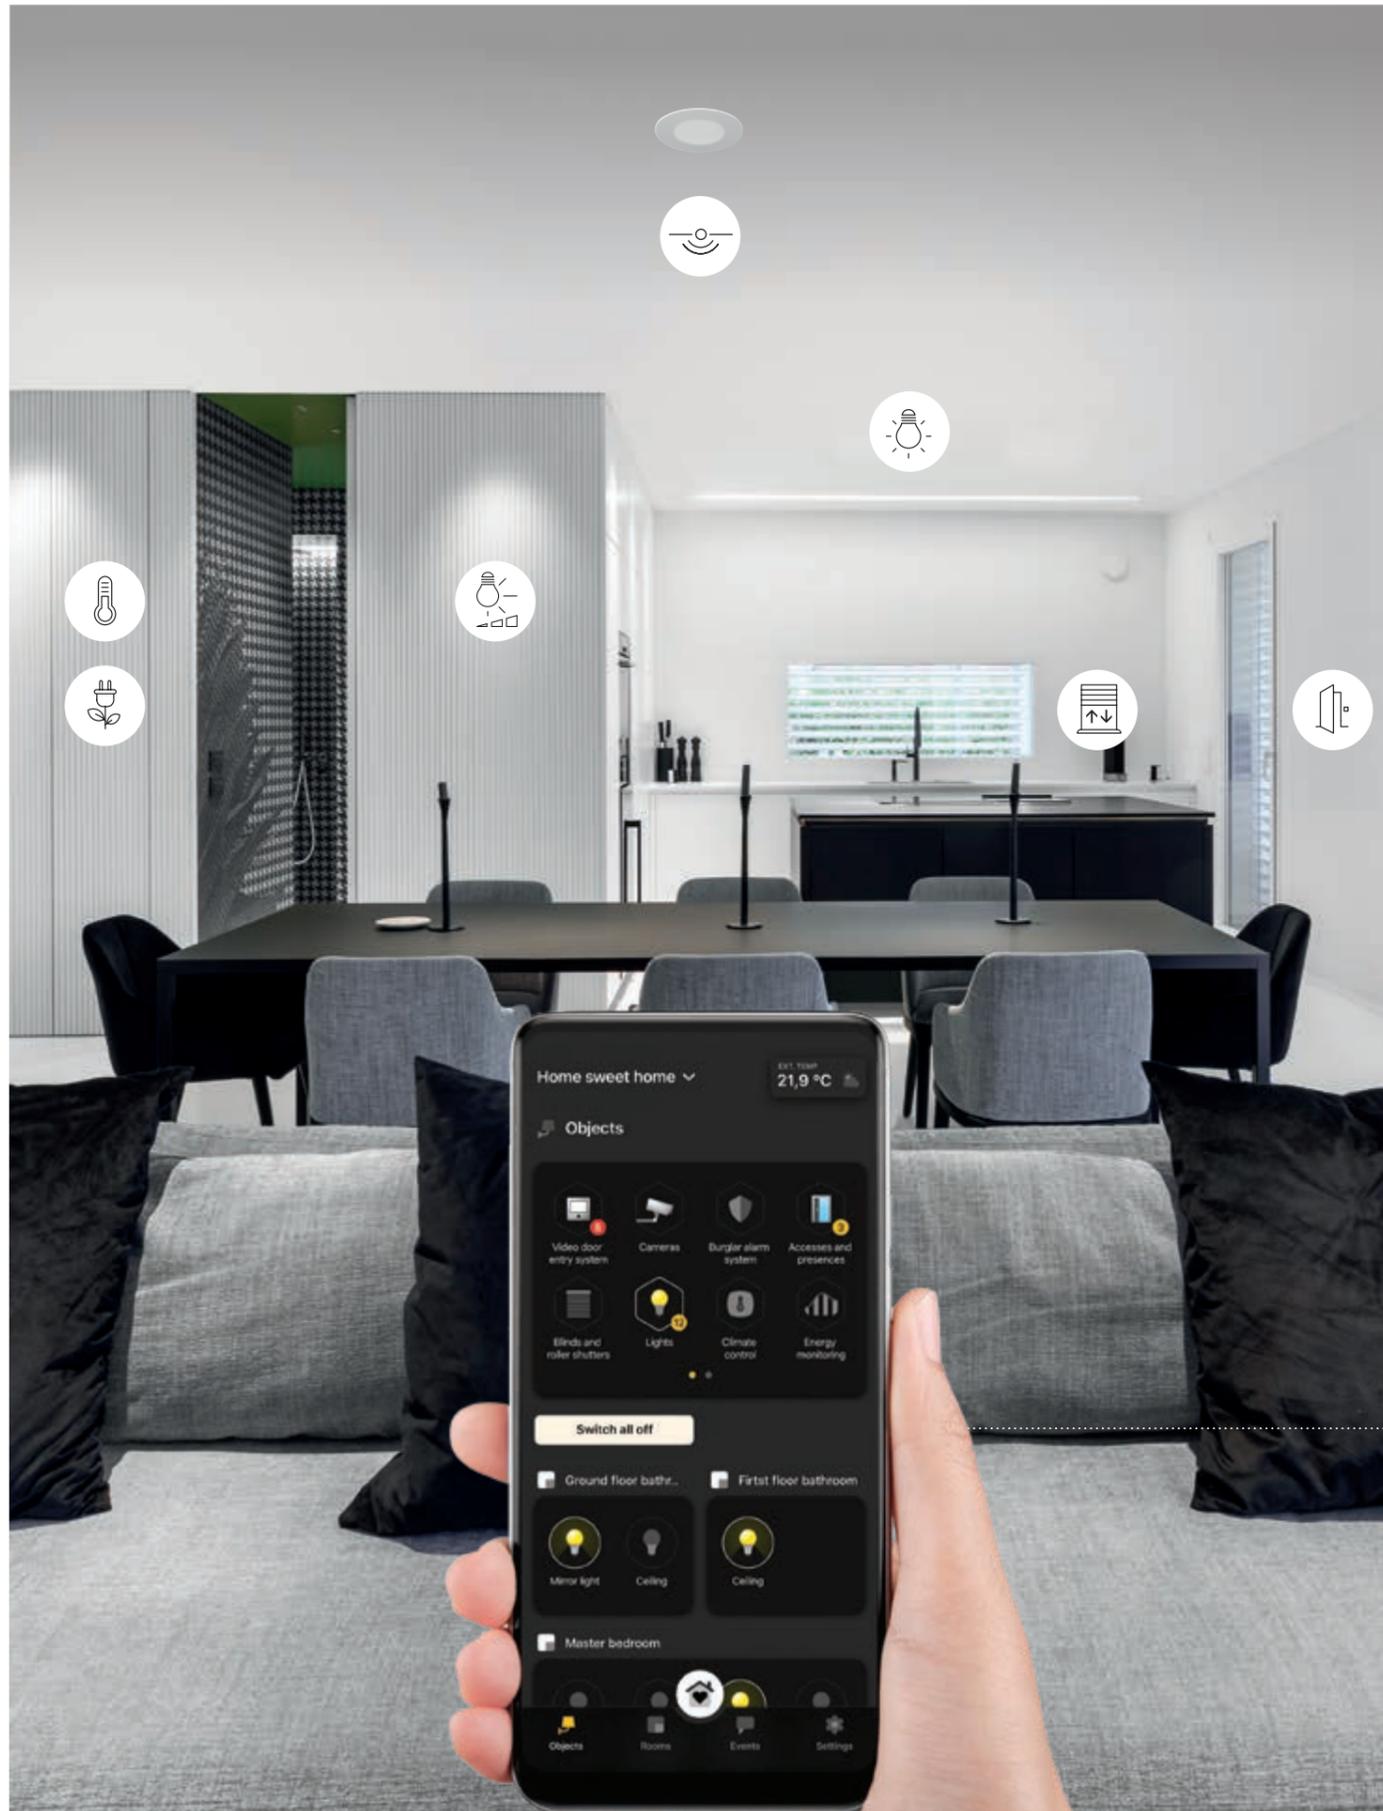


## The home simply becomes connected. From a single action to several devices interacting.

The View Wireless system, thanks also to the **new connected dimmers**, makes it possible to **manage lighting in various rooms, roller shutters or motorised curtains and to control accesses**, and it does so in a simpler and safe way with the **new presence detectors**.

It can also be used to control **temperature, monitor energy consumption, manage loads and set scenarios** with the utmost simplicity using **conventional 1-way switches, the View App** or directly **by voice**.

View Wireless is **ideal for refurbishments** or to **boost the functions of an existing system**. It is also a **useful support means** for the elderly and people with restricted mobility, thanks to the **Assisted Living** function enabled by the new radar sensors.

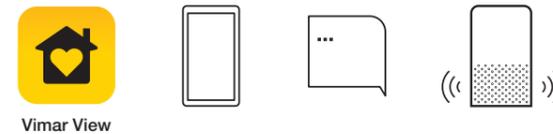


Vimar View

A **single App** for remote control and interaction.

The wiring series have become connected:



EIKON

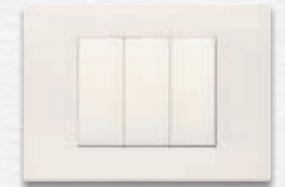

LINEA



ARKÉ



PLANA



IDEA



NEVE UP

**Good morning scenario**



## Go from action to interaction.

Thanks to the wireless connectivity of the gateway, you can control and manage lights, roller shutters, temperature and energy consumptions and loads, simply from your smartphone (via the VIEW APP locally or remotely) or naturally using your voice directly. The Bluetooth® wireless technology standard makes it possible to use devices in a mesh network: each device can work as a repeater and route messages through the network to reach devices which would otherwise be out of reach, thereby extending the coverage, minimising the necessary resource and energy consumption.






# View Wireless. Make your system connected.

View Wireless is the ideal solution to turn a traditional system into a connected one and is perfect when renovating an area of the home or an entire dwelling, store, restaurant, office and in those situations where masonry work and repainting tasks need to be kept to a minimum. A connected system gives you full control of your home.

TRADITIONAL WIRING SYSTEM → CONNECTED WIRING SYSTEM

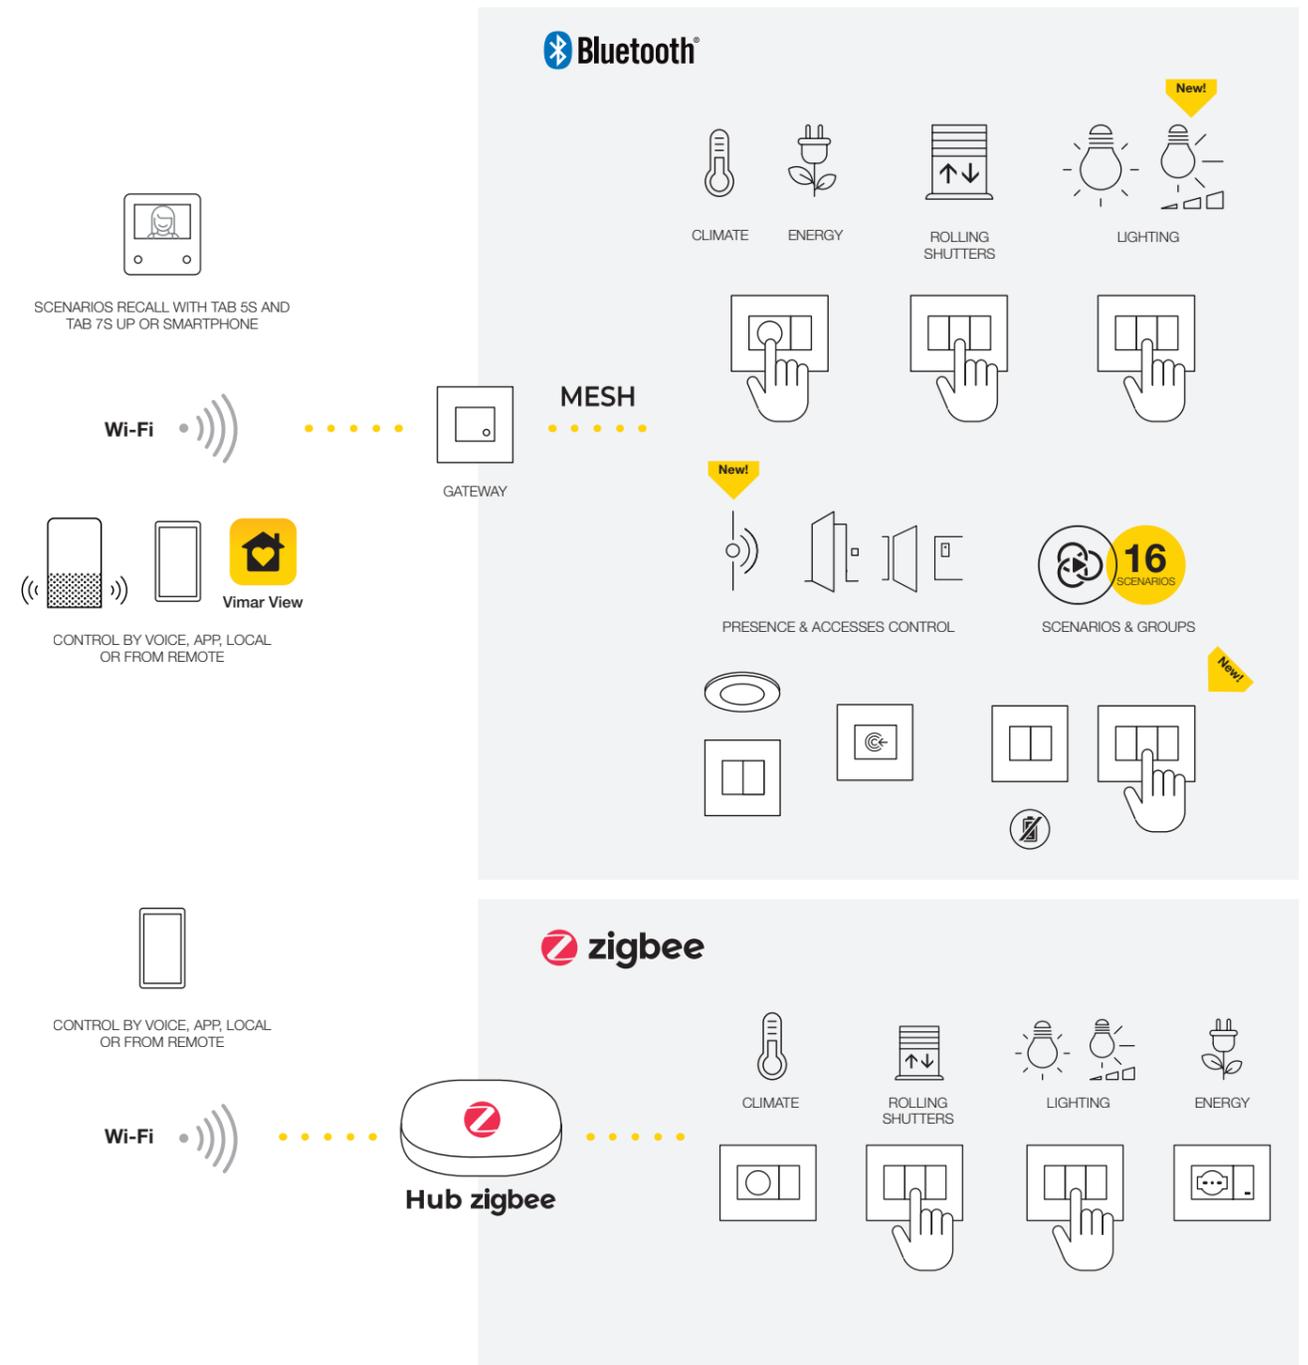




## Update your space simply.

Update, extend or replace your wiring system and can create a connected system, suitable for any architectural context, thanks to the completely matching styling of the digital products and their easy functional expandability. Simply replace traditional devices in the existing system or supplement them with Vimar's new connected devices and power them: 2-way switches, additional controls, roller shutter and curtain actuators, actuators for connected socket outlets, thermostats and radars for presence control equipped with Bluetooth® and Zigbee® technology. Available for all wiring series: Eikon, Linea, Arké, Plana and Neve Up.

**JUST A FEW TASKS. NO MASONRY WORK REQUIRED. IT IS VERSATILE.**

TRADITIONAL CONTROL

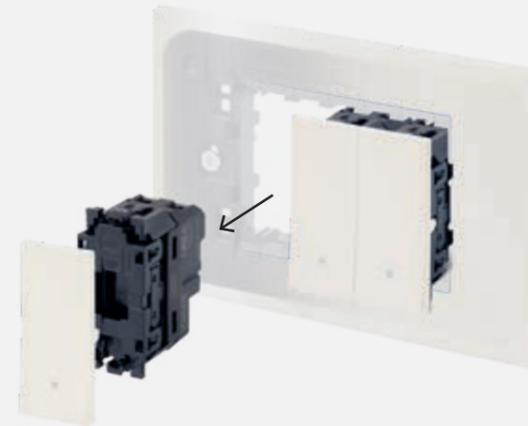

CONNECTED CONTROL



TRADITIONAL CONTROL WITH RELAY MODULE FOR CONNECTED RETROFITTING




TRADITIONAL CONTROL

RELAY MODULE

Bluetooth Zigbee

To facilitate the conversion of a traditional wiring system into a connected system, especially if fitted with push buttons and relays, retrofit **connected modules** are available for light and roller shutter relays. Both the relay for lights and the actuator for roller shutters can be retrofitted or installed in a junction box.

New system features: **connected dimmers, IoT controls, radar sensors** for greater comfort, efficiency and safety.

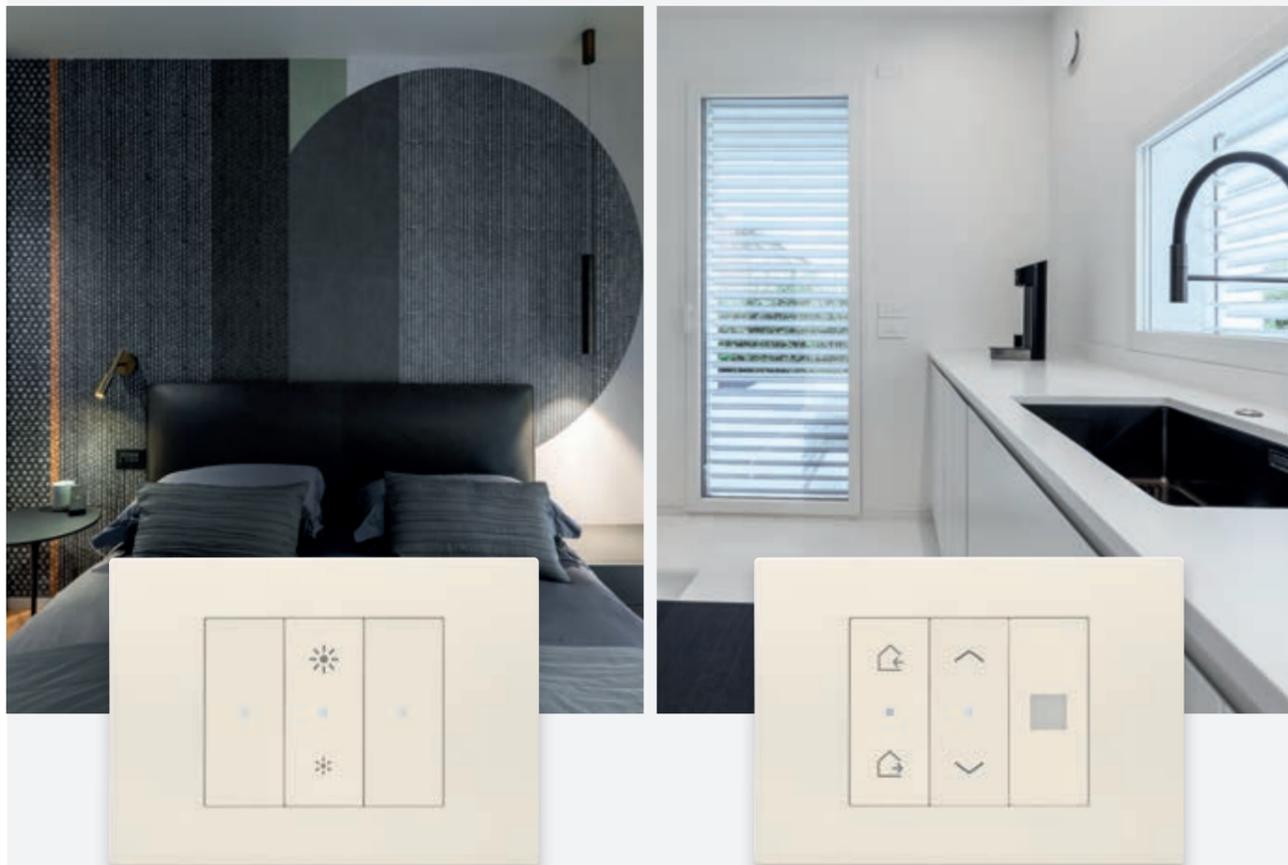

#### Connected dimmers.

The connected dimmers supplement the range of the View Wireless system and manage home lighting in a smarter way, to achieve the appropriate degree of lighting depending on the circumstances, **even more comfort** and **ultimate savings**. They can be remote controlled by the user thanks to the **View App**.

The connected dimmers can be used to adjust the brightness of the light, including remotely, from your smartphone

or using your voice, with immediate benefits:

- **1-module controls** 100-240 VAC 50/60 Hz, integrated with **Bluetooth® wireless technology 5.0 and Zigbee protocols**.
- **consumption reduction**: curbing the brightness of the lights reduces the power consumed and ultimately your energy bills
- **longer light bulb life**
- **creation of different sets of lights for a single system, to create comfortable settings** and enhance their characteristics


#### IoT connected electronic controls.

New IoT connected controls that complete the View Wireless system, to be combined with the connected devices which manage lights/roller shutters/relays, to **add additional control points via Bluetooth®** which can also be used to call up scenarios. To complete the controls, buttons with "lights", "roller shutters", "scenario" and neutral symbols are available with customisable graphics.

- **1-module controls** 100-240 VAC 50/60 Hz, integrated with **Bluetooth® wireless technology 5.0 protocol**
- **Easy integration** in the View Wireless mesh system, thanks to programming via the View Wireless App;
- Configurable **RGB control unit signalling**, for matching combination with the other control devices

#### Presence detector and radar sensors.

**Two new IoT sensors** with Ultra Wide Band UWB radar technology, which make it possible, by measuring **micro-movements of the body with the utmost precision** (even the breathing of an immobile person), to detect the presence of a person in a room. The View Wireless App can be used for instance to configure the distance, the relay closing time, the behaviour and the colour of the integrated RGB LED and the parameter setting for the wired input for bespoke configuration. What's more, the ceiling version features the detection of accidental falls, which proves useful to signal when a person has fallen and needs assistance via a notification.

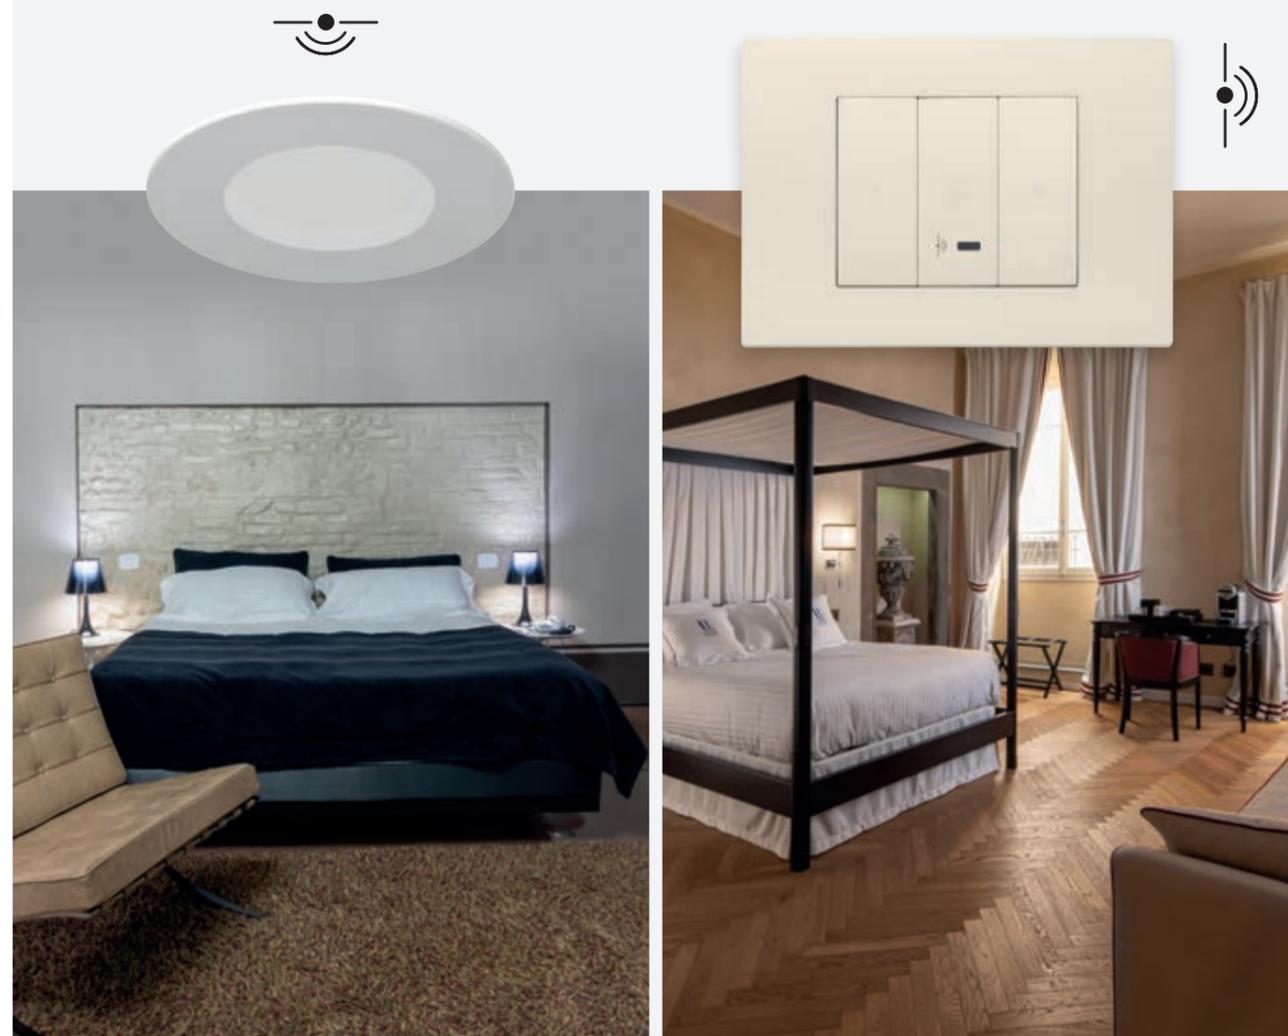

The **presence detector**, which is discretely designed and suitable for any setting, can be installed in a false ceiling or masonry ceilings using a dedicated adaptor.

The new **radar sensor** boasts a clean-cut design, to match Vimar's wiring series to perfection.

## Easier, more functional.

Compared to a traditional system, the connected system makes it possible to have more functions **at hand**, or **vocally controllable**. A connected home thus guarantees **greater comfort**, **more efficiency** and **security** both when you are inside the environments as well as when you are out of doors, enhancing the value of the property and **improving life for those who live there**.

### THE CONVENIENCE OF CONTROL VIA APP

To control the status of lights, the position of curtains and motorised roller shutters, as well as temperature, accesses and energy loads, wherever you may be.




### THE OPPORTUNITY OF VOICE CONTROL

Controlling your home with your voice makes technology accessible to everyone, including the elderly or the disabled.




### THE CERTAINTY OF PHYSICAL CONTROL

Pressing a 1-way switch increases the boundaries thanks to the battery-free and wireless digital controls, which can be positioned and inserted in any environment and surface according to personal preference.

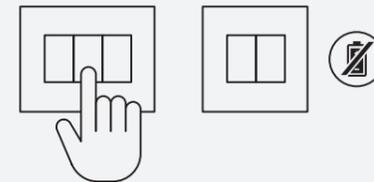


### THE PERFECT SCENARIOS, WITH JUST ONE TOUCH

The scenarios can be recalled through various devices: switch control, smartphone by app View and also by video door phones Tab 5S Up and Tab 7S Up.

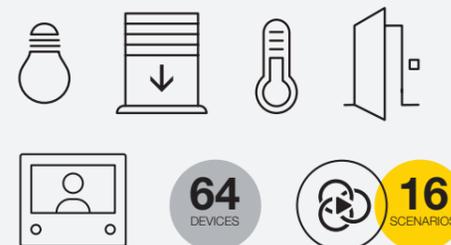

### TEMPERATURE REGULATION, COMFORT AND ENERGY SAVING

Smart thermostats to manage the heating and air conditioning for the maximum comfort of entire home but also for avoiding energy waste.

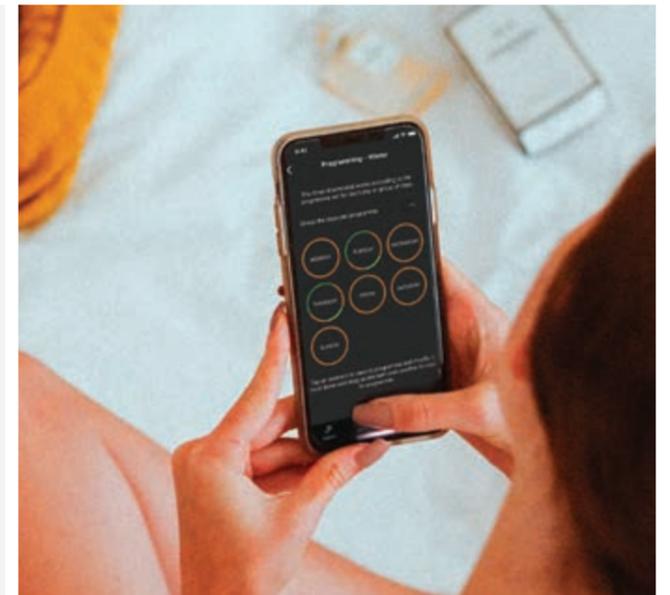

## Smarter, more **control.**

### The versatility of updating settings with time, making them smarter, without any masonry work.

The View Wireless system makes it possible to add smart functions at home, in the office, as well as in hotels. Designed to adjust the brightness of lights and detect presences in a setting, for responsible, waste-free energy consumption in complete safety.

### SMART SYSTEM FOR ACCESS CONTROL.

Ideal for small and medium-sized accommodation facilities such as country guest houses and B&Bs, offering guests the very best in comfort and safety, guaranteeing the manager superior performance and energy efficiency. With the new View Key App, your smartphone can become a key ring to access restricted areas.



### KNOWING THE CONSUMPTION OF THE BUILDING TO PREVENT POWER OUTAGES

You can check the electricity consumption of your entire home or manage the loads of individual appliances from your smartphone, to avoid power outages and monitor the production of the photovoltaic system. Manage individual loads by transforming the socket outlet into a connected one.



### THE RIGHT LIGHTING AT ALL TIMES FOR PROPER ENERGY USAGE

Thanks to connected dimmers, at home, in the office or in hotels, lighting can be managed depending on the circumstances: energy wastage is avoided and lighting management of all settings is simpler and more convenient for responsible energy use.



New!




### MANAGING GUESTS AND STAFF IN ACCOMMODATION FACILITIES OR OFFICES IS EASIER

With the **UWB presence sensor**, scenarios can be associated when the presence of a person in a room is no longer detected, or climate control can be reactivated when a guest returns to their room.



New!

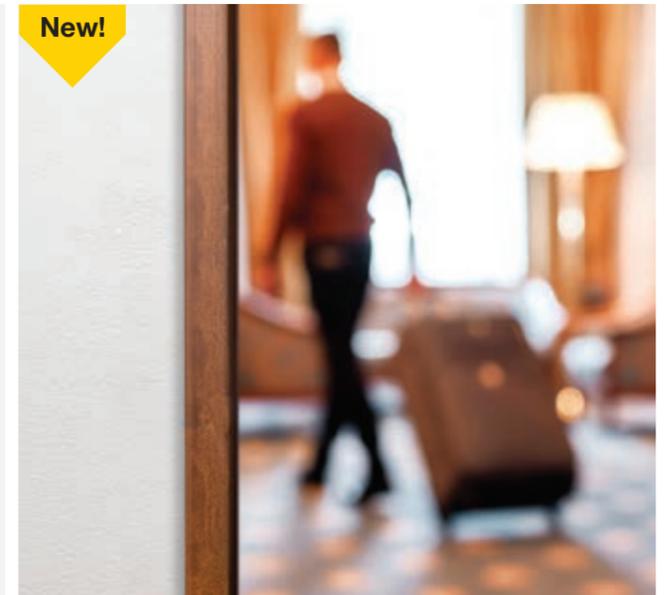


### ASSISTED LIVING

The ceiling version of the sensor is designed to detect whether a person is on the ground and send a notification to a smartphone or activate a scenario.



New!

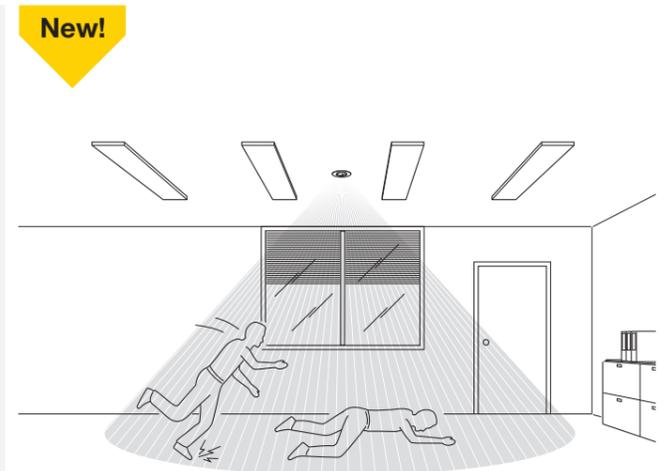


# Dual intelligence, dual technology.

Vimar pursued the utmost simplicity to create integration with the technologies and the other smart devices used in everyday environments and life. It is easy to configure a smarter home, suited to the customer's needs. All the devices in the View Wireless system are fitted with dual Bluetooth® wireless and Zigbee®. Configuration is immediate with the View Wireless app. All you need to perform are a few tasks.



## Integration with Bluetooth® wireless technology

For better exploiting all functions of digital products, you can connect lighting, shutters, curtains, thermostats, and transponder readers to the flush mounting Bluetooth/Wi-Fi gateway. By creating the mesh system on Bluetooth® wireless technology, it is thus possible to supervise the system via Wi-Fi from View app and integrate via cloud all the main smart speakers: Siri, Amazon Alexa and Google Home. Compatible with IFTTT for integration with third parties.

### Bluetooth®

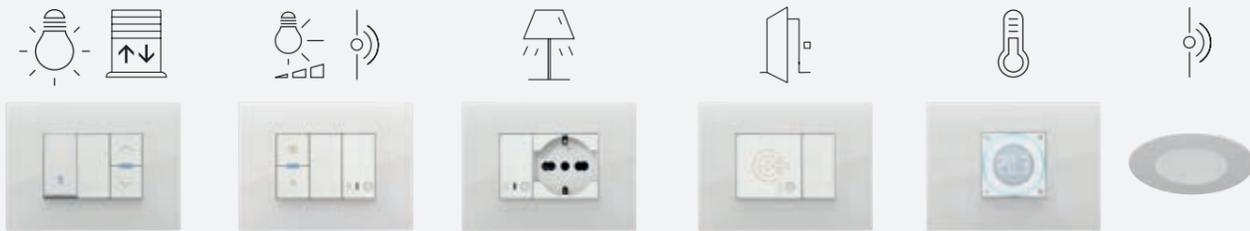



The functions of traditional systems can be boosted by adding radio frequency controls that do not require an electrical power supply.



## Integration with other devices with Zigbee® home automation hub function

If you have an Amazon Alexa device in your home, with the Zigbee® protocol, the smart speaker becomes the gateway for connection to the Vimar digital devices and the control point for their basic functions (lights and roller shutters).

### zigbee

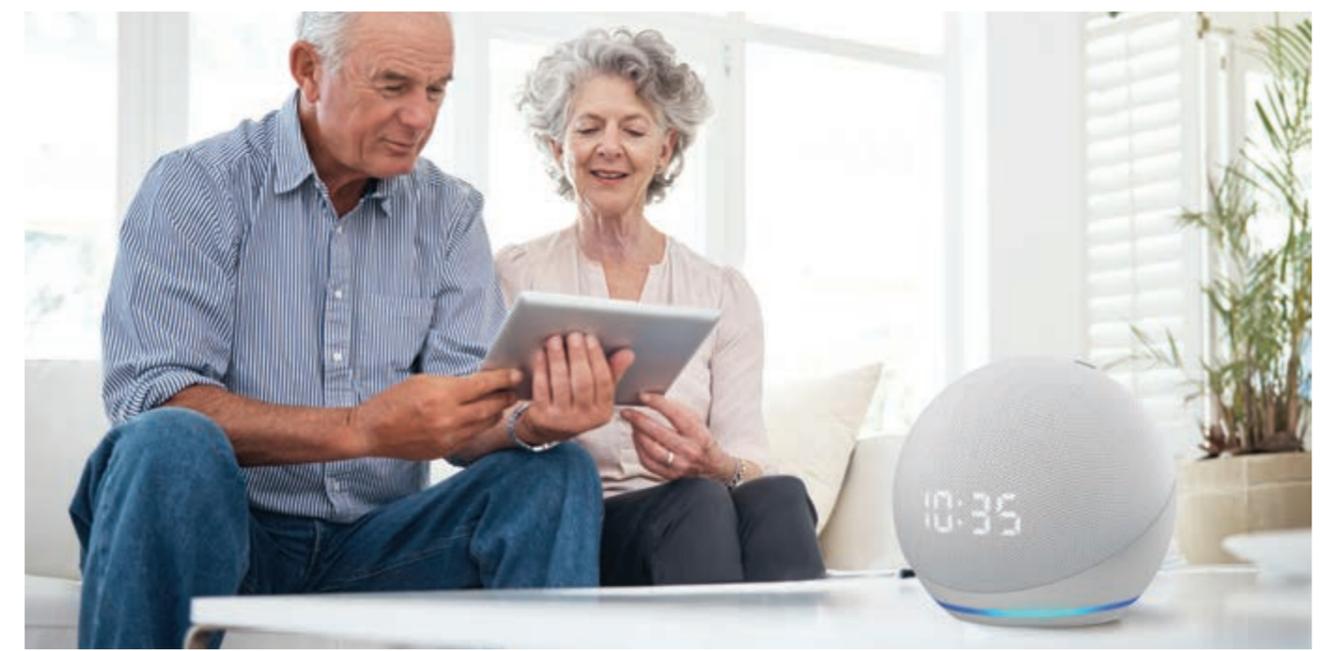


## Be smart, grab all the advantages of your system.

The Vimar solution, which is ideal for simple renovations, is also applicable to existing systems, simply to update the wiring system. There is no need for a dedicated infrastructure or space on the control unit.

### The advantage of dual technology.

The system is fitted with 2-way switches, roller shutter actuators, dimmers, IoT controls and actuators for socket outlets with dual Bluetooth®/ZigBee® technology. The basic configuration of Vimar connected devices envisages the Bluetooth® wireless technology 5.0 standard as the pre-loaded connectivity protocol: it is the basis for the creation of a network of control points connected with the Wi-Fi gateway as the access point and control via the View app on smartphones or the most commonly used smart speakers.

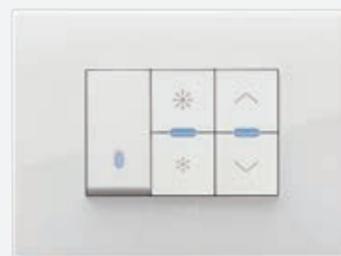

### Bluetooth® Mesh system to get the most of the functions both locally and remotely.

Thanks to the Wi-Fi gateway and to the View and View Wireless apps, you can therefore:

- remote control lights, roller shutters, temperature and access control and expand the system even with battery-free controls, which can be positioned freely throughout your home
- control a socket outlet and measure the consumption of the connected load, receiving a notification if the threshold is exceeded
- set the operation and colour of the back-lighting LEDs on the controls
- create scenarios
- control the system using voice controls (Amazon Alexa, Google Assistant and Siri)


### Zigbee® protocol to use the basic functions of the connected products.

Using the View Wireless configuration app, you can change the protocol in favour of Zigbee, enabling the direct integration of devices with Zigbee hub (e.g. Amazon Echo, 4th generation) and managing a smart basic ecosystem to control lights, roller shutters, temperature and generic loads. Simplicity of integration with other worlds.

## Extra-easy installation in just a few steps.


### 1. Connection of the connected devices.

The installation of the connected controls is very simple; the traditional electro-mechanical devices are replaced with the corresponding connected device, one for each light or roller shutter to be controlled; in the case of energy socket outlets, simply add a serial connected actuator to the phase. The connected device must be powered with PHASE and NEUTRAL.

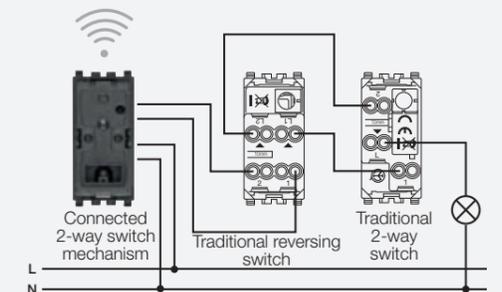

### 2. Configuration is straightforward.

The View Wireless app is available with a guided wizard. Configuration follows a sequential flow and is guided by simple explanatory screens to create environments and associate the connected devices; the parameter setting of individual devices (operation and backlighting); the transfer of settings and parameters to the gateway with connection to the Wi-Fi network in the building.

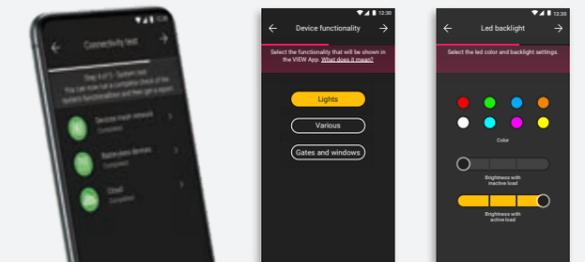


Easy to attribute the function to the device and to configure the colour and brightness of the device LEDs.



View Wireless

### 3. The smart system is ready, a single app for your customer.

A single ecosystem for a future view. Platforms and systems that are integrable to provide a concrete response to the needs of those who design and who live in the spaces of the future, in search of comfort and protection.

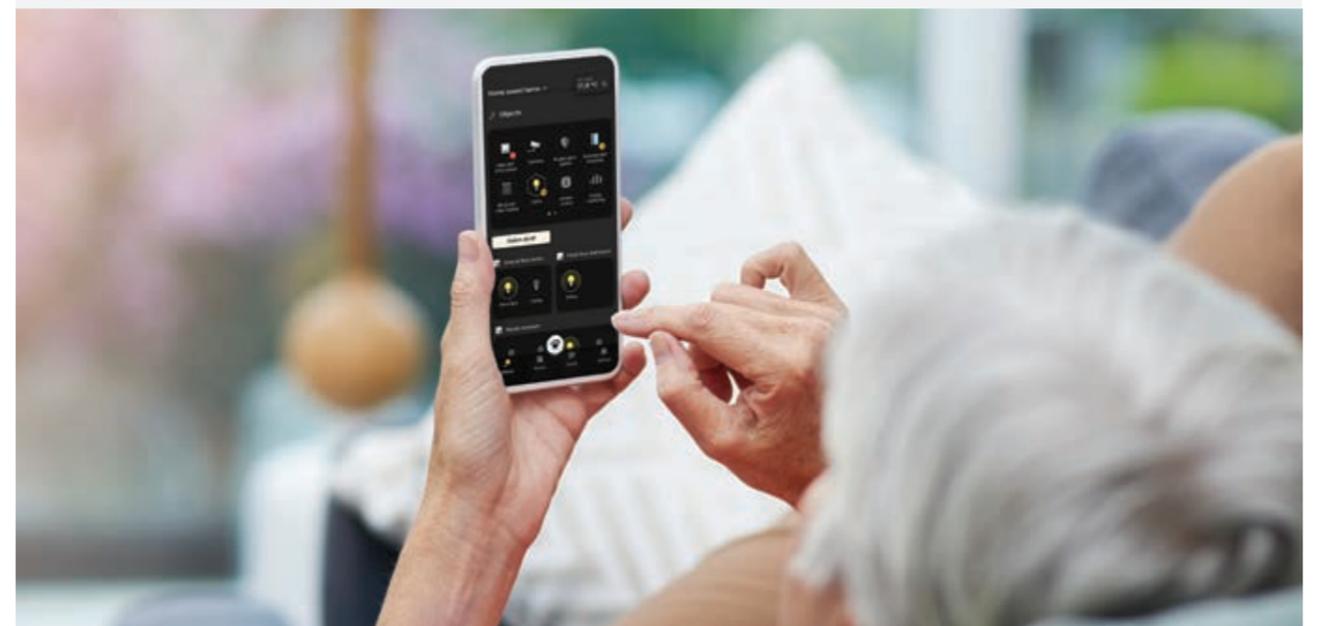

## Expand your system stress-free and **wireless.**

To View Wireless system it is possible to connect via Bluetooth® up to 2 radiofrequency controls per each connected (2-way switch, actuator for rolling shutters, sockets and retrofit), thus enhancing the functions of conventional systems.


- > **Versatile:** they can be fitted onto any surface, such as wood, glass, and walls.
- > **Speedy installation:** no need for masonry work or repainting; no flush mounting boxes necessary.
- > **You can add or reposition** wireless controls for lights, roller shutter, curtains and socket outlets at any time to suit your particular needs.




> **Move it** somewhere else if this is more convenient.




> **For all surfaces.**  
Apply it at any time onto any surface and in any point.

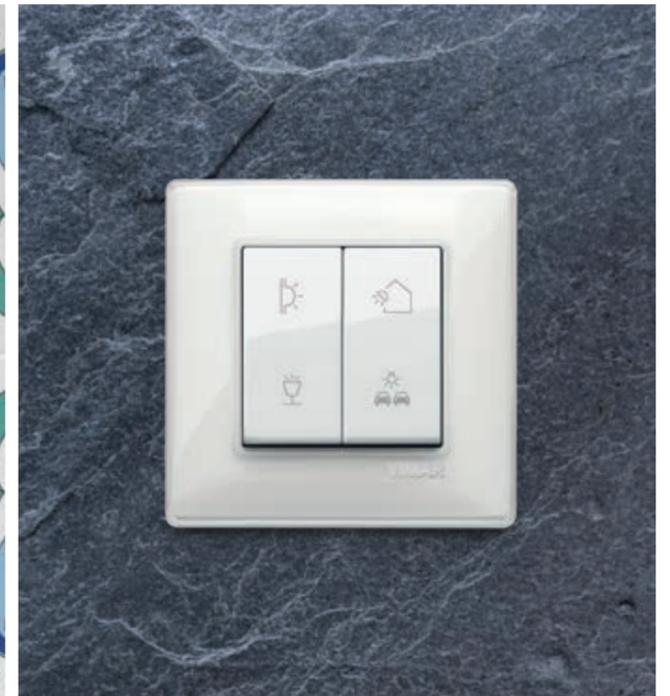

> **Wireless**  
Battery-free controls send the signal to the connected 2-way switch to which they are associated, exploiting the power supply provided by the built-in electro-dynamic generator.

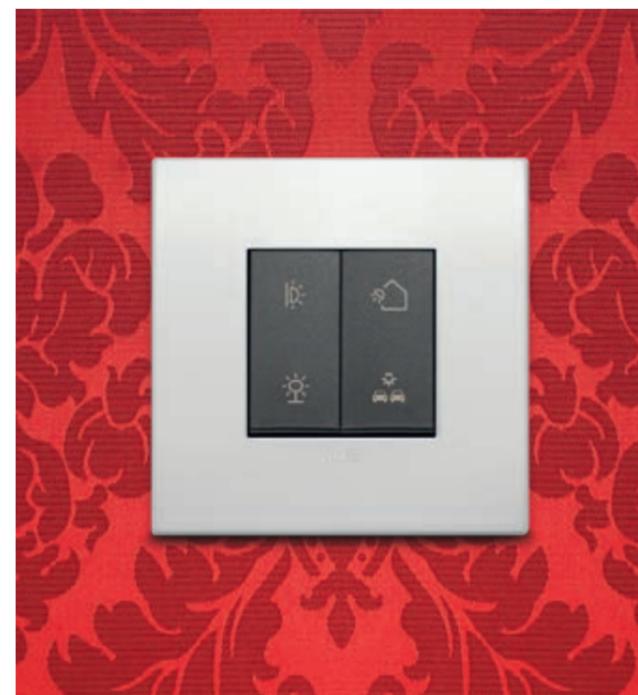

> **Battery-free**  
It is self-powered by the energy produced when pressing the keys, with no need for batteries. Periodic maintenance to change them is therefore not required.

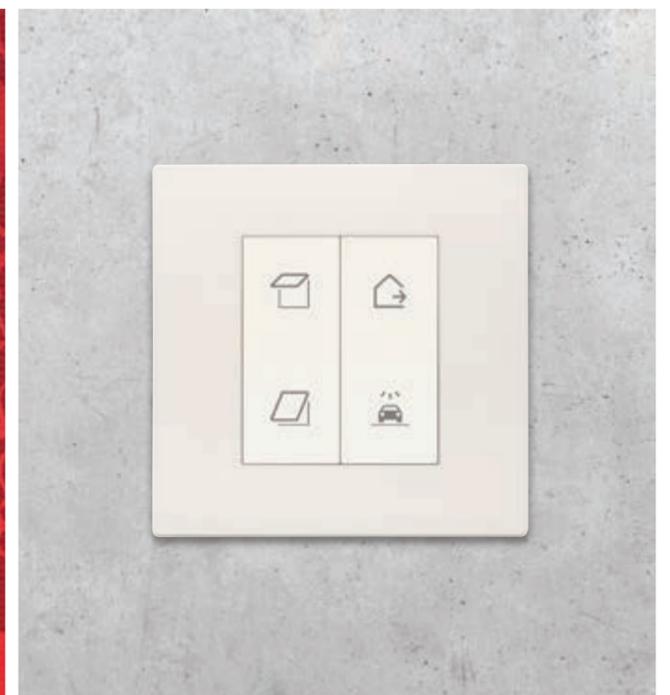

> **Even more functions**  
Each control consists of 4 push buttons which can be configured individually or in pairs according to the characteristics of the associated receivers.

## Everything is at hand.



The user can manage, control and create favourite scenarios **using the View app**. Simply download it from the main stores, associate the Vimar gateway to the app and to the Wi-Fi network in the environment and become the system administrator.

### A SINGLE APP: EVEN MORE FUNCTIONS, EVEN SIMPLER

- > Customise over time up to 16 scenarios, such as a single control (off) to switch off all the lights and lower all the roller shutters at the same time.
- > View and control the status of lights, roller shutters or sun awnings and loads connected to the socket outlets
- > Program and manage the ideal temperature in every room
- > View the total consumption of the home and of each connected socket outlet and any photovoltaic systems
- > Receive notifications if the contractual power level is exceeded to avoid power black-outs and in the event of malfunctioning loads
- > Unique app: the system is expandable and View app enables managing the other Vimar alarm and video door entry systems (By-alarm, Elvox Video door entry system)




Vimar View



## Everything is vocally controllable.

Controlling your home with your voice, Amazon Alexa integrated voice control or other smart speakers, makes technology accessible to everyone, including the elderly or the disabled.

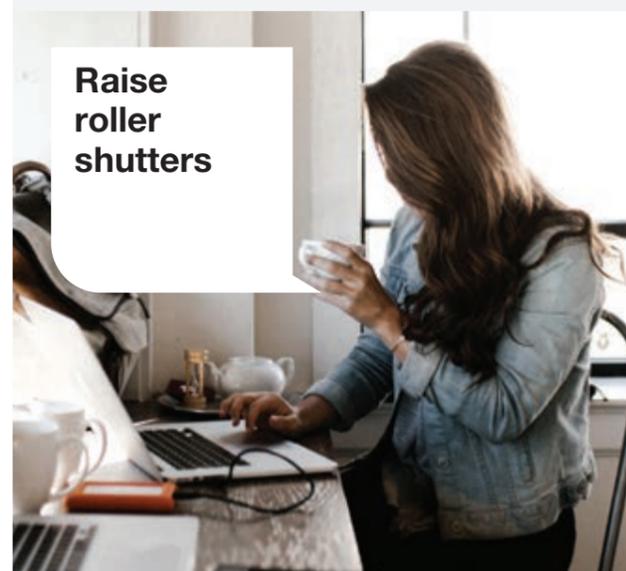

## Supervision with entryphones.

The **Tab 5S Up** and **Tab 7S Up** video entryphones into the video door entry system, by View app, enable **scenarios activation** in the View Wireless connected system.

### FUNCTIONS AND ADVANTAGES

- > Import the preset scenarios configured by means View Wireless app with Vimar cloud access
- > Activation of scenarios by shortcut keyboard of the video entryphone or by icons of the touch screen
- > Available functions even for systems with Tab 5S Up and Tab 7S Up video entryphones already installed and connected to internet, by firmware update
- > Possibility of expansion of the View Wireless system over time, depending on the personal needs



SCENARIOS

# It's better with Vimar.

Simple, elegant and impeccable shapes.

Six wiring series to connect to the building, to enjoy the positive energy of the home.




Eikon




Plana



Linea

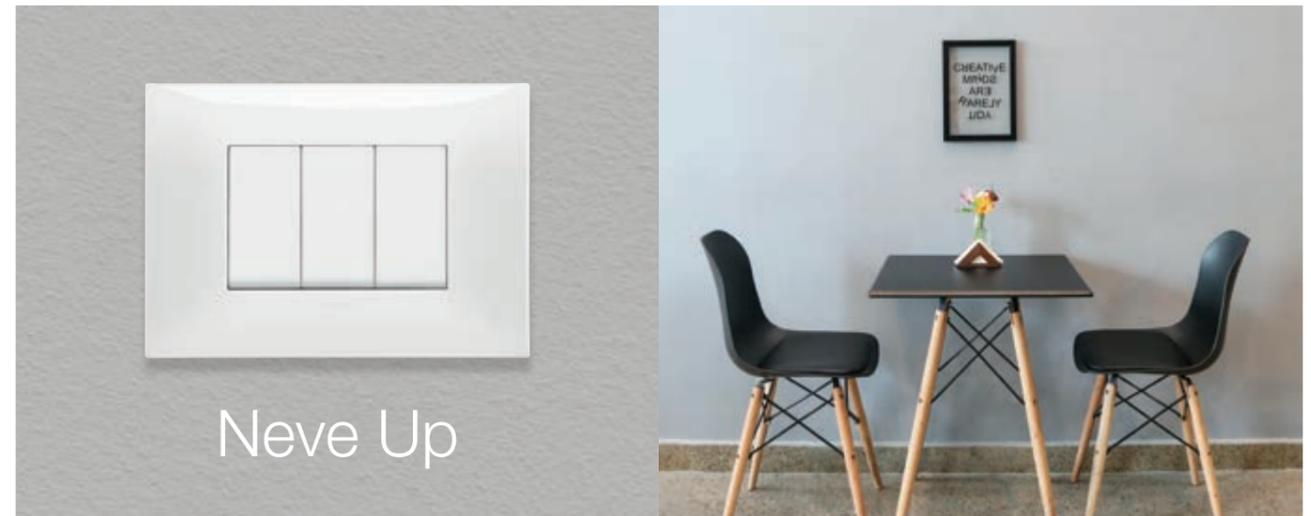

Neve Up

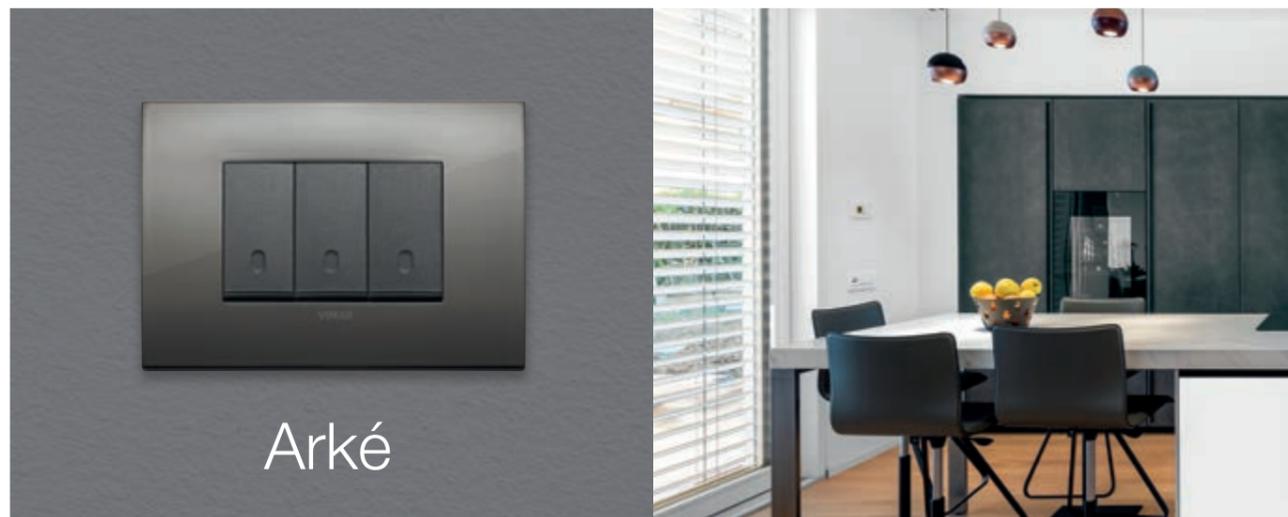

Arké




Idea



## Attention to detail to give rise to bespoke projects.

### Customisable buttons, functions and cover plates

To be clear on the function associated with the control, the buttons are also customisable with symbols (a broad range of pictograms is available, identifying the main functions of both traditional and smart controls). The LED technology backlighting, which is highly efficient and low consumption, can be customised both in terms of colours (RGB palette) and brightness on 4 different levels (for the visible in darkness function or load status signalling). Moreover, the cover plates can be **customised** with your **logo**, which is useful for hotel or B&B systems.

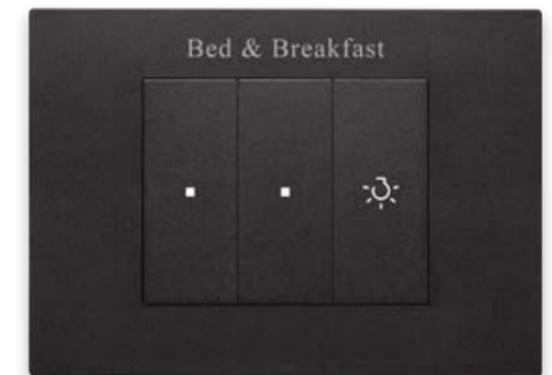

**LED backlighting** can be customised both in terms of colours from the RGB range as well as brightness on 4 different levels.



**The Linea series** offers multiple **backlighting** options for a sophisticated and distinctive effect every time. Aligned, axial and traditional rocker controls feature a distinctive illuminated mark to identify their function, even in the dark. For the aligned control, there is also the possibility of ordering a dedicated button to create a **vertical downward light beam**. The result is a discrete yet distinctive effect on the wall.



# Index

---

**TYPICAL INSTALLATIONS**

from page 28

---


**VIEW WIRELESS DEVICES**

from page 32

## Connected system based on Bluetooth® mesh system.

The **Bluetooth® wireless technology** standard makes it possible to use devices in a mesh network, whereby the gateway (20597, 19597 and 14597) is designed to allow the user to **control** the system **via the View App** both locally and remotely. Moreover, the system can also be controlled using Amazon Alexa, Google Assistant and Siri smart speakers and scenarios can be activated with the Tab 5S and Tab 7S Up video entryphones. The installer **configures** the system in Bluetooth® wireless technology mode and sets all the parameters **using the View Wireless app**, which also allows the addition of battery-free remote controls, based on energy harvesting technology by EnOcean, for the activation of scenarios or the


**Representation of a residential system with connected devices to control lights, roller shutter, temperature, energy management and access control. Up to 64 devices can be connected, and up to 16 favourite scenarios can be set. Radio frequency devices can also be added to the system.**

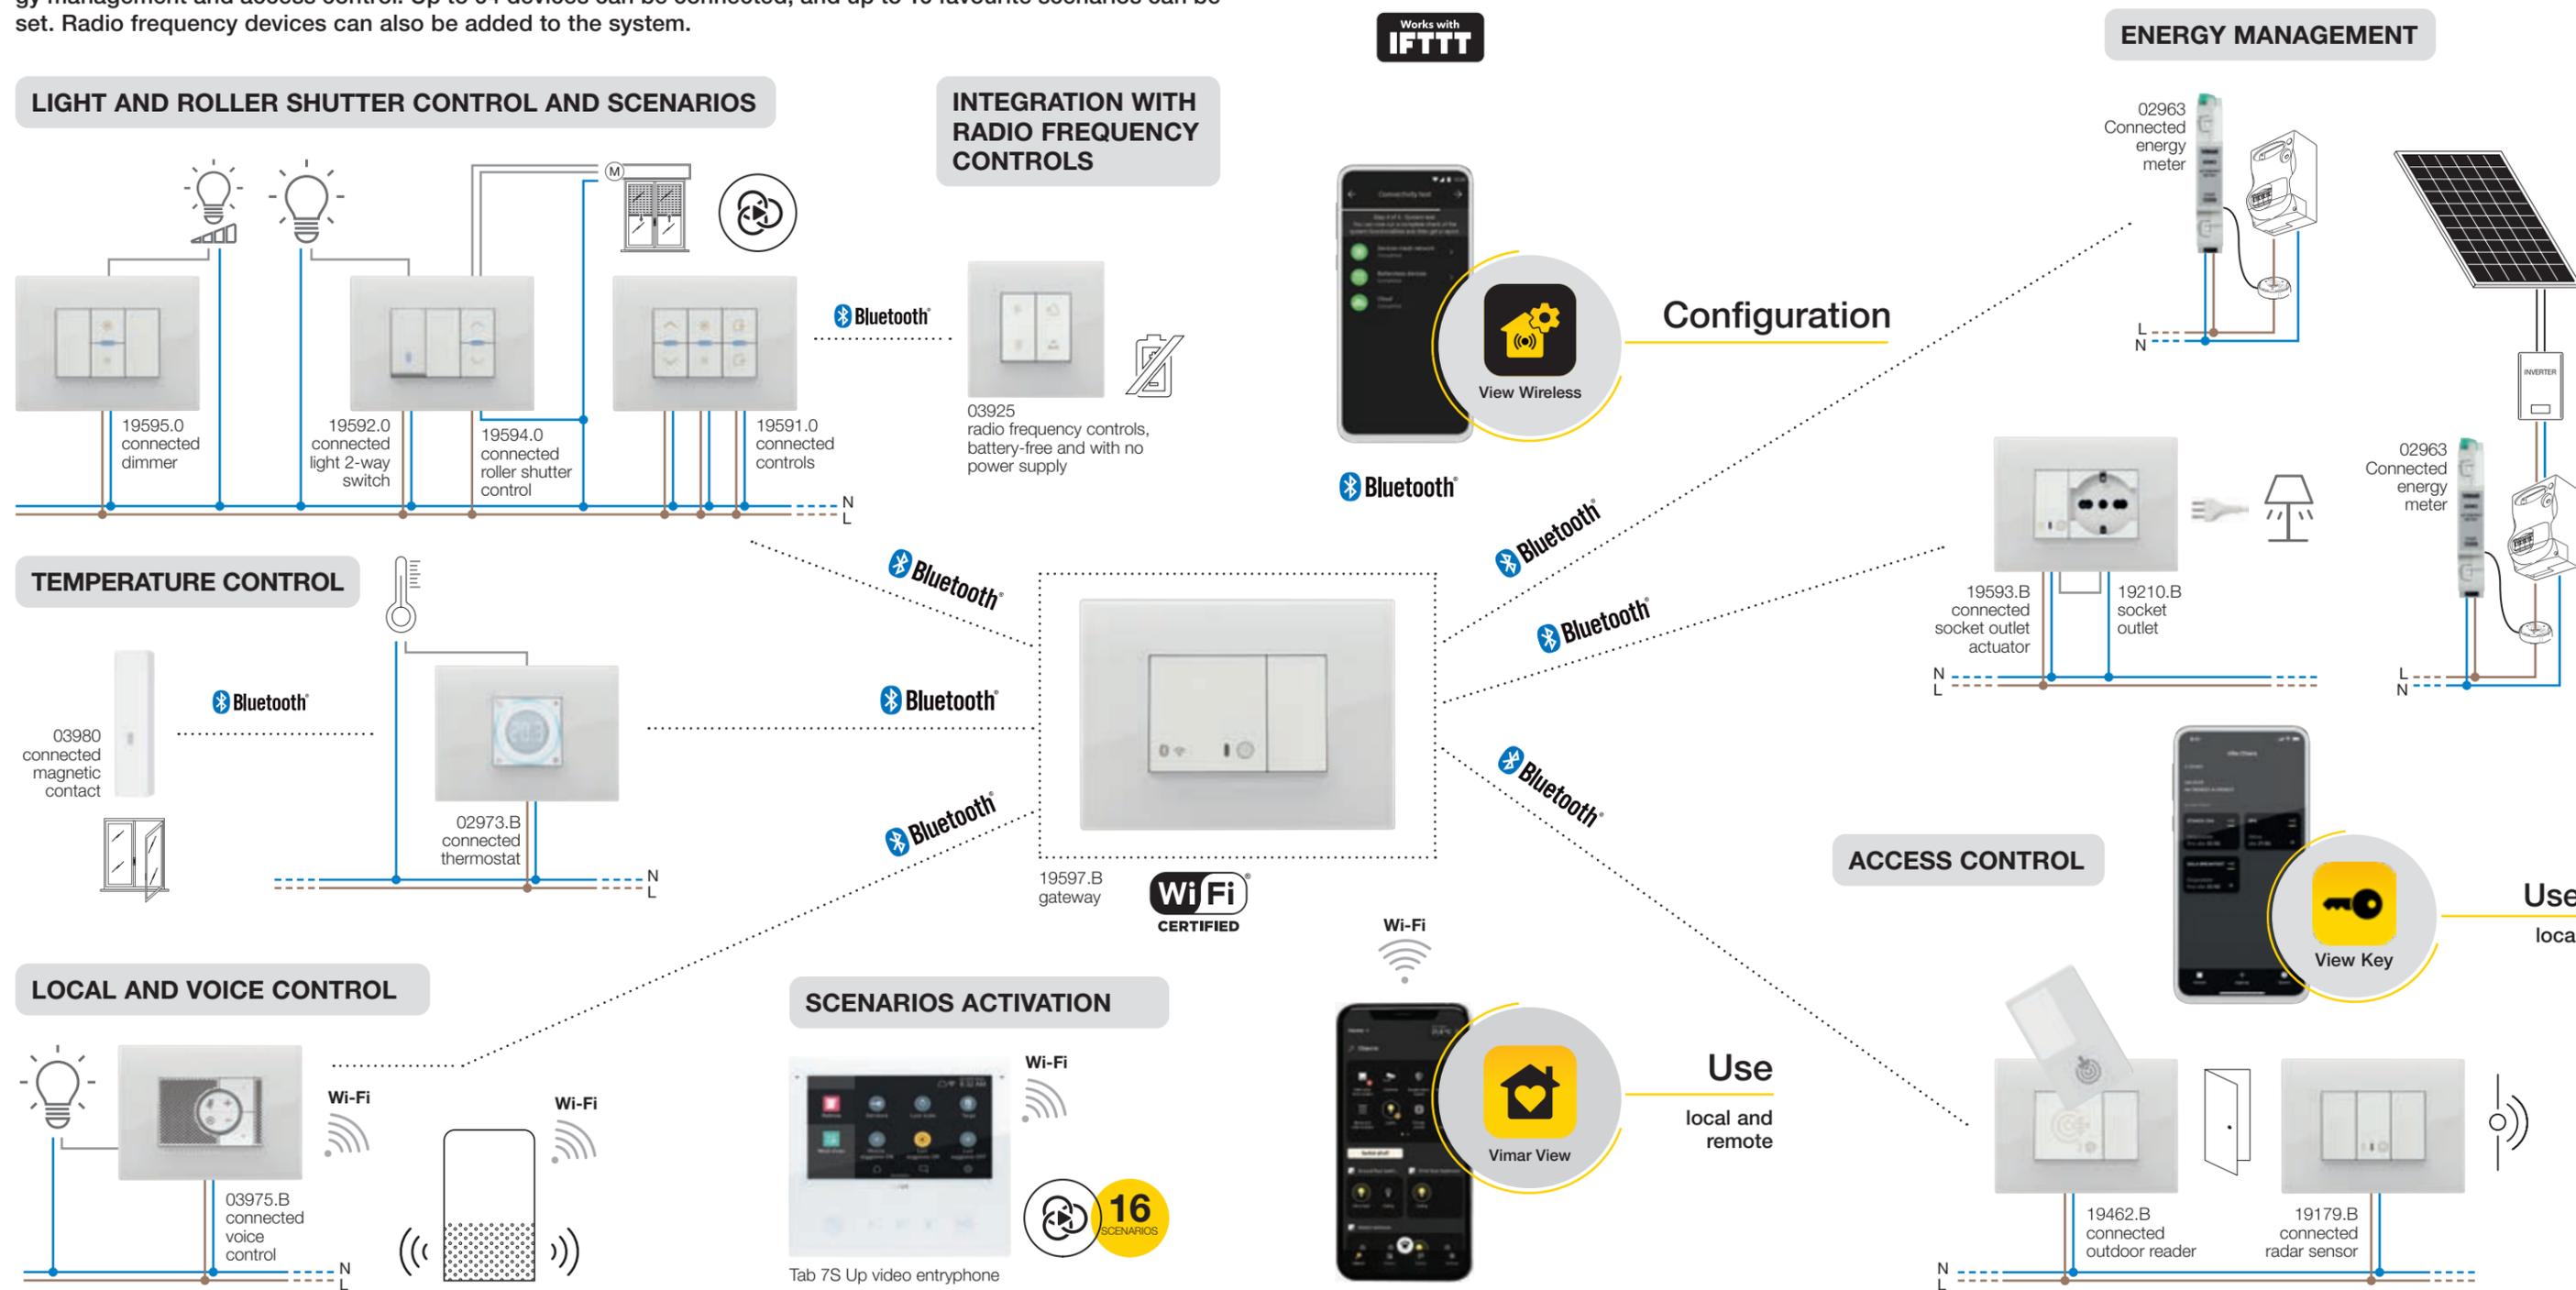

addition of other control devices. The wiring of connected devices requires a power supply (L, N) and connection to the related loads and/or electro-mechanical control devices (2-way switches, 1-way switches, push buttons). The presence of Wi-Fi Internet connection is always required, to allow the connection to the Cloud for supervision (local and remote) and for integrations with the Alexa, Google Assistant and Siri smart speakers. The system is compatible with IFTTT. By integrating IFTTT compatible third-party devices, recipes/applets can be created, involving climate control, the use of periodic timers, astronomical clocks, the weather and information about energy production or consumption. For instance, on reaching a specific internal temperature, you can turn on the air conditioning using a third-party IR interface, or turn on a light at sunset.

### Connected system based on app and cloud Vimar.

Connected system for lights, roller shutters and socket outlet with flush-mounted Wi-Fi gateway, supervision with **View** app and integration with radio frequency control with Bluetooth® Low Energy battery-free standard. Complete control with Siri, Amazon Alexa and Google Home through the Vimar Cloud and simplified configuration with **View Wireless** app.

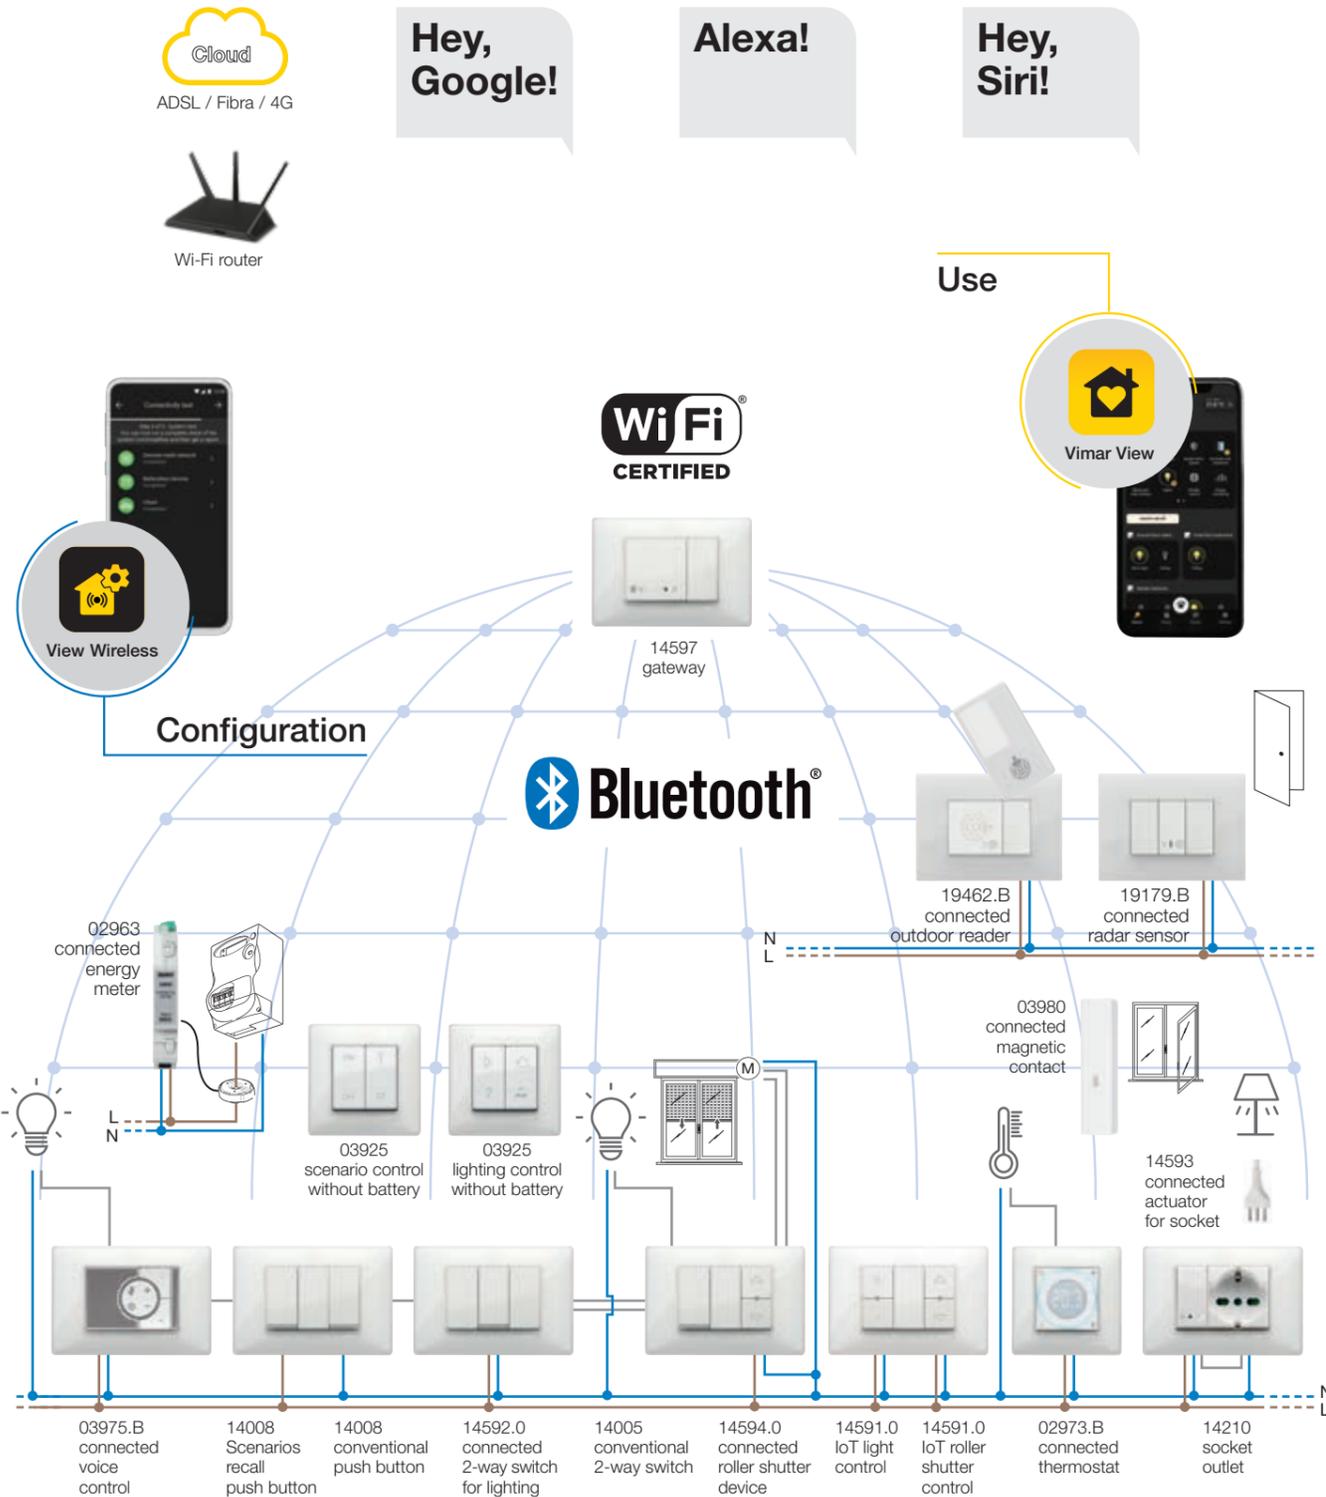

### Integration of the connected products in a smart ecosystem based on Zigbee hub, app and third-party cloud.


The **Zigbee technology** standard makes it possible to use devices directly in combination with a third-party Zigbee gateway, such as Amazon Echo or Show; in this mode, configuration takes place **by the Alexa App** and integration with vocal control is native.

The **View Wireless App** is only required to upload the Zigbee 3.0 protocol onto each individual connected device, guaranteeing use in an Alexa Smart Home without requiring additional gateways (the network HUB is Alexa).

The wiring of connected devices requires a power supply (L, N) and connection to the related loads and/or electro-mechanical control devices (2-way switches, 1-way switches, push buttons). The presence of Wi-Fi Internet connection is always required, to allow the connection to the Cloud for supervision (local and remote) and for integrations with the Alexa voice assistant.

#### System with integration of connected devices in a smart system with Amazon Echo.

Control lights, roller shutters, temperature and generic loads directly from the Amazon Alexa App with Amazon devices featuring Zigbee connectivity, including with connected retrofit modules. Configuration is done natively via the Amazon App. The functions that can be configured and controlled depend on the third-party Zigbee Hub (in this example, the Amazon Echo smart speaker).

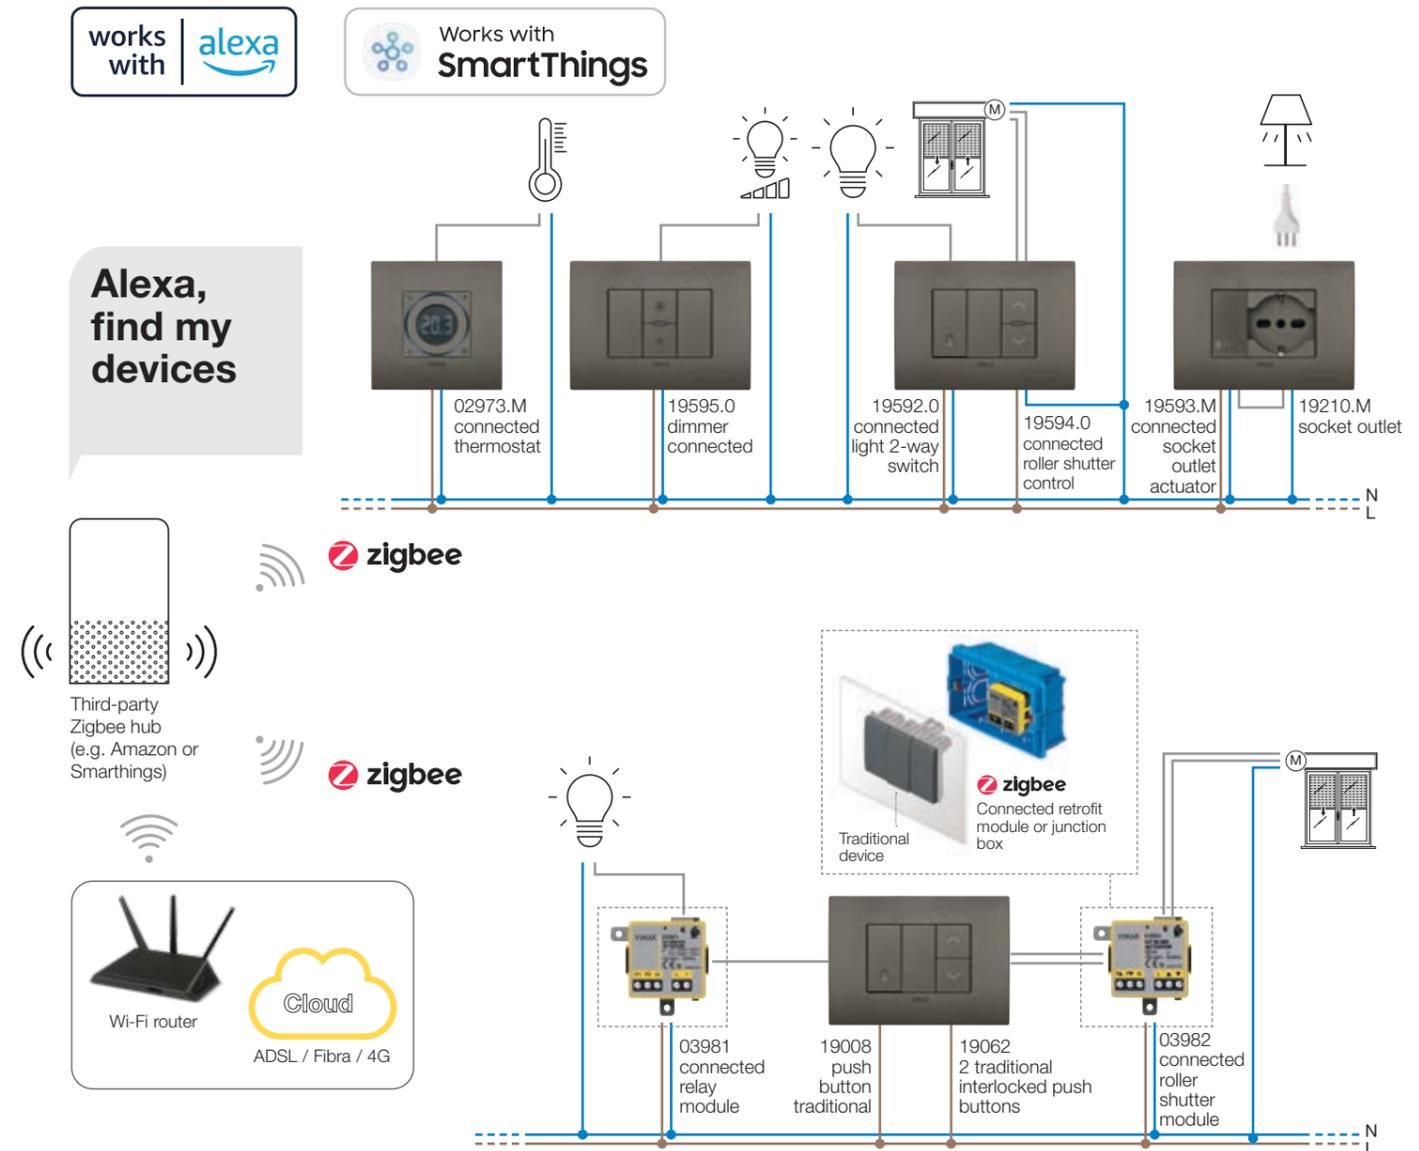

# VIEW WIRELESS

## Connected devices



### EIKON LINEA ARKÉ

#### Gateway



**20597**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, grey - 2 modules. Depth: 37 mm



**20597.B**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 37 mm



**20597.N**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, Next - 2 modules. Depth: 37 mm



**30807.G**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, black - 2 modules. Depth: 38.8 mm



**30807.B**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 38.8 mm



**30807.C**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, canvas - 2 modules. Depth: 38.8 mm



**19597**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, grey - 2 modules. Depth: 36.7 mm



**19597.B**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 36.7 mm



**19597.M**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, Metal - 2 modules. Depth: 36.7 mm

### IDEA PLANA NEVE UP

#### Gateway



**16497**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, grey - 2 modules. Depth: 36.9 mm



**16497.B**  
Gateway View Wireless, Bluetooth® wireless technology 4.2 Wi-Fi, alimentazione 100-240 V 50/60 Hz, bianco - 2 moduli. Profondità: 36,9 mm



**14597**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 36 mm



**14597.SL**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 36.9 mm



**09597**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, white - 2 modules. Depth: 37.2 mm



**09597.CM**  
View Wireless Gateway, Bluetooth® wireless technology 4.2 Wi-Fi, power supply 100-240 V 50/60 Hz, Carbon Matt - 2 modules. Depth: 37.2 mm

# VIEW WIRELESS

## Connected devices



### EIKON LINEA ARKÉ IDEA PLANA

#### Gateway with mounting frame for Neve Up



**OK14597.01**  
Wi-Fi Bluetooth® wireless technology gateway for integration, configuration and supervision of View Wireless system by Cloud and app for smartphone and tablet, 100-240 V 50/60 Hz power supply, on DIN (60715 TH35) rail installation, occupies 2 17,5 mm modules

#### Mounting frames for iPads



**▲ 01430**  
Mounting frame for 10.9-11" iPad devices, comprising a decorative frame with surface mounting frame with wall plugs, supplied with type C USB cable and no power supply unit, black



**▲ 01430.B**  
Mounting frame for 10.9-11" iPad devices, comprising a decorative frame with surface mounting frame with wall plugs, supplied with type C USB cable and no power supply unit, white




**▲ 01430.N**  
Mounting frame for 10.9-11" iPad devices, comprising a decorative frame with surface mounting frame with wall plugs, supplied with type C USB cable and no power supply unit, Next

#### Connected vocal controls



**03975**  
2 front buttons, RGB LED backlighting, 1 input for wired push button, 1 NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system, 100-240 V 50/60 Hz power supply, grey - 3 modules. Depth: 35 mm To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723.



**03975.B**  
2 front buttons, RGB LED backlighting, 1 input for wired push button, 1 NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system, 100-240 V 50/60 Hz power supply, white - 3 modules. Depth: 35 mm To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723.



**03975.N**  
2 front buttons, RGB LED backlighting, 1 input for wired push button, 1 NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system, 100-240 V 50/60 Hz power supply, Next - 3 modules. Depth: 35 mm To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723.



**03975.M**  
2 front buttons, RGB LED backlighting, 1 input for wired push button, 1 NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system, 100-240 V 50/60 Hz power supply, Metal - 3 modules. Depth: 35 mm To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723.



**30815.G**  
2 front buttons, RGB LED backlighting, 1 input for wired push button, 1 NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system, 100-240 V 50/60 Hz power supply, black - 3 modules. Depth: 39.2 mm To be completed with Linea cover plates.



**30815.B**  
2 front buttons, RGB LED backlighting, 1 input for wired push button, 1 NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system, 100-240 V 50/60 Hz power supply, white - 3 modules. Depth: 39.2 mm To be completed with Linea cover plates.



**30815.C**  
2 front buttons, RGB LED backlighting, 1 input for wired push button, 1 NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system, 100-240 V 50/60 Hz power supply, canvas - 3 modules. Depth: 39.2 mm To be completed with Linea cover plates.



Alexa is not available in all languages and countries

# VIEW WIRELESS

## Connected devices



### EIKON LINEA ARKÉ

#### Connected 2-way switches



**20592.0**  
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons.  
Depth: 37.5 mm



**30802**  
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1-module interchangeable buttons.  
Depth: 33.8 mm



**19592.0**  
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons.  
Depth: 36.5 mm

### IDEA PLANA NEVE UP

#### Connected 1-module 2-way switches



**16492**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, grey.  
Depth: 37.6 mm



**14592.0**  
Mechanism, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario. To be completed with 1, 2, or 3-module interchangeable buttons.  
Depth: 36.5 mm



**09592**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, white.  
Depth: 37.9 mm



**16492.B**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, white.  
Depth: 37.6 mm



**09592.CM**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, Carbon Matt.  
Depth: 37.9 mm

#### Neve Up connected 2-module 2-way switches



**09592.2**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, white.  
Depth: 37.9 mm



**09592.2.CM**  
View Wireless electronic 2-way switch, with 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, local or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external button for actuator control or to recall a scenario, Carbon Matt.  
Depth: 37.9 mm

# VIEW WIRELESS

## Connected devices



### EIKON

#### 1-module interchangeable buttons for connected 2-way switch (lightable)



**20021**  
Neutral, grey



**20021.B**  
Neutral, white



**20021.N**  
Neutral, Next



**20021.L**  
Light symbol, grey



**20021.L.B**  
Light symbol, white



**20021.L.N**  
Light symbol, Next



**20021.P**  
Key symbol, grey



**20021.P.B**  
Key symbol, white



**20021.P.N**  
Key symbol, Next



**20026**  
With diffuser, grey



**20026.B**  
With diffuser, white



**20026.N**  
With diffuser, Next



**20026.PLS**  
Please Clean symbol, with diffuser, grey



**20026.PLS.B**  
Please Clean symbol, with diffuser, white



**20026.PLS.N**  
Please Clean symbol, with diffuser, Next



**20026.DND**  
Do Not Disturb symbol, with diffuser, grey



**20026.DND.B**  
Do Not Disturb symbol, with diffuser, white



**20026.DND.N**  
Do Not Disturb symbol, with diffuser, Next



**20031**  
Customisable, grey



**20031.B**  
Customisable, white



**20031.N**  
Customisable, Next

#### 2-module interchangeable buttons for connected 2-way switch (lightable)



**20022**  
Neutral, grey



**20022.B**  
Neutral, white



**20022.N**  
Neutral, Next



**20022.L**  
Light symbol, grey



**20022.L.B**  
Light symbol, white



**20022.L.N**  
Light symbol, Next



**20022.P**  
Key symbol, grey



**20022.P.B**  
Key symbol, white



**20022.P.N**  
Key symbol, Next



**20027**  
With diffuser, grey



**20027.B**  
With diffuser, white



**20027.N**  
With diffuser, Next



**20032**  
Customisable, grey



**20032.B**  
Customisable, white




**20032.N**  
Customisable, Next

#### 3-module interchangeable buttons for connected 2-way switch (lightable)



**20023**  
Neutral, grey



**20023.B**  
Neutral, white



**20023.N**  
Neutral, Next



**20028**  
With diffuser, grey



**20028.B**  
With diffuser, white



**20028.N**  
With diffuser, Next



**20033**  
Customisable, grey



**20033.B**  
Customisable, white



**20033.N**  
Customisable, Next

# VIEW WIRELESS

## Connected devices



### LINEA

Aligned 1-module interchangeable buttons for connected 2-way switch (lightable)



Axial 1-module interchangeable buttons for connected 2-way switch (lightable)



# VIEW WIRELESS

## Connected devices



### ARKÉ

1-module interchangeable buttons for connected 2-way switch (lightable)



2-module interchangeable buttons for connected 2-way switch (lightable)



3-module interchangeable buttons for connected 2-way switch (lightable)



# VIEW WIRELESS

## Connected devices



### PLANA


1-module interchangeable buttons for connected 2-way switch (lightable)



2-module interchangeable buttons for connected 2-way switch (lightable)



3-module interchangeable buttons for connected 2-way switch (lightable)

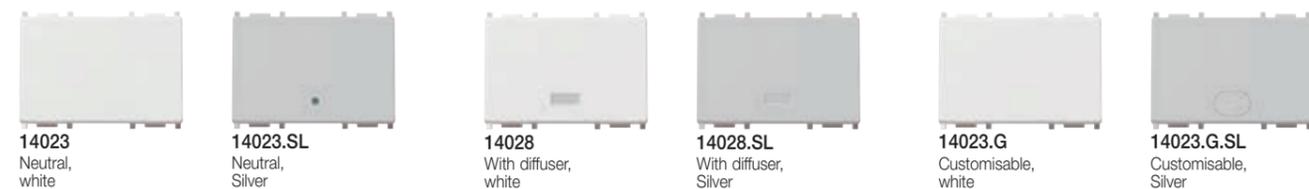

# VIEW WIRELESS

## Connected devices



### EIKON

### LINEA

### ARKÉ

Connected controls for roller shutters



### IDEA

### PLANA

### NEVE UP

Connected controls for roller shutters



# VIEW WIRELESS

## Connected devices



### EIKON LINEA ARKÉ

1-module interchangeable buttons and half-button caps for connected controls



**20755.2**  
Arrows symbol, grey



**20755.2.B**  
Arrows symbol, white



**31000A.FG**  
Arrows symbol, black



**31000A.FB**  
Arrows symbol, white



**19755.2**  
Arrows symbol, grey



**19755.2.B**  
Arrows symbol, white



**20755.2.N**  
Arrows symbol, Next



**31000A.FC**  
Arrows symbol, canvas



**19755.2.M**  
Arrows symbol, Metal

### IDEA PLANA NEVE UP

1-module interchangeable buttons and half-button caps for connected controls



**14755.2**  
Arrows symbol, white



**14755.2.SL**  
Arrows symbol, Silver



**14755.2**  
Arrows symbol, white



**14755.2.SL**  
Arrows symbol, Carbon Matt

### Connected retrofit actuator for roller shutters



**03982**  
Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0.6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)

# VIEW WIRELESS

## Connected devices



### EIKON LINEA ARKÉ

Connected dimmers



**20595.0**  
Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.5 mm



**30805**  
Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with 1-module interchangeable buttons. Depth: 39 mm



**19595.0**  
Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm

### IDEA PLANA NEVE UP

Connected dimmers



**14595.0**  
Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm



**09595.0**  
Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm



**09595.0.120**  
Dimmer mechanism for 20-200 W incandescent lamps, 2-200 W LED lamps, 20-200 W electronic transformers, Bluetooth® wireless technology 5.0 for View Wireless and mesh system and Zigbee 3.0, 1 input for external push button for dimmer control or to recall a scenario. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm

### EIKON LINEA ARKÉ

1-module interchangeable buttons and half-button caps for connected dimmers



**20755.3**  
Dimmer symbol, grey



**20755.3.B**  
Dimmer symbol, white



**31000A.RG**  
Dimmer symbols, black



**31000A.RB**  
Dimmer symbols, white



**19755.3**  
Dimmer symbol, grey



**19755.3.B**  
Dimmer symbol, white



**20755.3.N**  
Dimmer symbol, Next



**31000A.RC**  
Dimmer symbols, canvas



**19755.3.M**  
Dimmer symbol, Metal

# VIEW WIRELESS

## Connected devices



### IDEA PLANA NEVE UP

1-module interchangeable buttons and half-button caps for connected dimmers



**14755.3**  
Dimmer symbol,  
white



**14755.3.SL**  
Dimmer symbol,  
Silver



**14755.3**  
Dimmer symbol,  
white



**14755.3.CM**  
Dimmer symbol,  
Carbon Matt

### EIKON LINEA ARKÉ

Connected electronic controls



**▲ 20591.0**  
Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 37.5 mm



**▲ 30801**  
Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with 1-module interchangeable buttons. Depth: 33.8 mm



**▲ 19591.0**  
Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm

1-module interchangeable buttons and half-button caps for connected electronic controls



**20755**  
Neutral,  
grey



**20755.B**  
Neutral,  
white



**20755.N**  
Neutral,  
Next



**31000A.G**  
Neutral,  
black



**31000A.B**  
Neutral,  
white



**31000A.C**  
Neutral,  
canvas



**19755**  
Neutral,  
grey



**19755.B**  
Neutral,  
white



**19755.M**  
Neutral,  
Metal

1-module interchangeable buttons and half-button caps for connected electronic controls



**20755**  
Neutral,  
grey



**20755.B**  
Neutral,  
white



**20755.N**  
Neutral,  
Next



**31000A.G**  
Neutral,  
black



**31000A.B**  
Neutral,  
white



**31000A.C**  
Neutral,  
canvas



**19755**  
Neutral,  
grey



**19755.B**  
Neutral,  
white



**19755.M**  
Neutral,  
Metal



**20755.2**  
Arrows symbol,  
grey



**20755.2.B**  
Arrows symbol,  
white



**20755.2.N**  
Arrows symbol,  
Next



**31000A.FG**  
Arrows symbol,  
black



**31000A.FB**  
Arrows symbol,  
white



**31000A.FC**  
Arrows symbol,  
canvas



**19755.2**  
Arrows symbol,  
grey



**19755.2.B**  
Arrows symbol,  
white



**19755.2.M**  
Arrows symbol,  
Metal

# VIEW WIRELESS

## Connected devices



### EIKON LINEA ARKÉ

1-module interchangeable buttons and half-button caps for connected electronic controls



**20755.3**  
Dimmer symbol,  
grey



**20755.3.B**  
Dimmer symbol,  
white



**20755.3.N**  
Dimmer symbol,  
Next



**31000A.RG**  
Dimmer symbols,  
black



**31000A.RB**  
Dimmer symbols,  
white



**31000A.RC**  
Dimmer symbols,  
canvas



**19755.3**  
Dimmer symbol,  
grey



**19755.3.B**  
Dimmer symbol,  
white



**19755.3.M**  
Dimmer symbol,  
Metal



**20755.6**  
Scenarios symbol,  
grey



**20755.6.B**  
Scenarios symbol,  
white



**20755.6.N**  
Scenarios symbol,  
Next



**31000A.SG**  
Scenarios symbols,  
black



**31000A.SB**  
Scenarios symbols,  
white



**31000A.SC**  
Scenarios symbols,  
canvas



**19755.6**  
Scenarios symbol,  
grey



**19755.6.B**  
Scenarios symbol,  
white



**19755.6.M**  
Scenarios symbol,  
Metal

### IDEA PLANA NEVE UP



**▲ 14591.0**  
Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 36.5 mm



**▲ 09591.0**  
Control mechanism, local control with push button or remote control, IoT technology on Bluetooth® wireless technology 5.0 standard for View Wireless mesh system. To be completed with two 1-module interchangeable half-button caps. Depth: 37.8 mm

1-module interchangeable buttons and half-button caps for connected electronic controls



**14755**  
Neutral,  
white



**14755.SL**  
Neutral,  
Silver



**09755**  
Neutral,  
white



**09755.CM**  
Neutral,  
Carbon Matt



**14755.2**  
Arrows symbol,  
white



**14755.2.SL**  
Arrows symbol,  
Silver



**09755.2**  
Arrows symbol,  
white



**09755.2.CM**  
Arrows symbol,  
Carbon Matt



**14755.3**  
Dimmer symbol,  
white



**14755.3.SL**  
Dimmer symbol,  
Silver



**09755.3**  
Dimmer symbol,  
white



**09755.3.CM**  
Dimmer symbol,  
Carbon Matt



**14755.6**  
Scenarios symbol,  
white



**14755.6.SL**  
Scenarios symbol,  
Silver



**09755.6**  
Scenarios symbol,  
white



**09755.6.CM**  
Scenarios symbol,  
Carbon Matt

# VIEW WIRELESS

## Connected devices



EIKON LINEA ARKÉ

### Radio frequency control



**03925**  
Flat control with 4 push buttons, RF transmitter, 2.4 GHz, Bluetooth® Low Energy wireless technology standard, energy harvesting power supply provided by built-in electro-dynamic generator, to be completed with Eikon 20506 or 20506.2, Arké 19506 and 19506.2, Idea 16526 or 16526.2, Plana 14506 or 14506.2 buttons - 2 modules

### Connected socket outlet actuators



**20593**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, grey.  
Depth: 39.5 mm



**30803.G**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, black. Depth: 42.8 mm



**19593**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, grey.  
Depth: 39 mm



**20593.B**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white.  
Depth: 39.5 mm



**30803.B**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white.  
Depth: 42.8 mm



**19593.B**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white.  
Depth: 39 mm



**20593.N**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, Next.  
Depth: 39.5 mm



**30803.C**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, canvas.  
Depth: 42.8 mm



**19593.C**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, Metal.  
Depth: 39 mm

IDEA PLANA NEVE UP



**16493**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, grey.  
Depth: 39.5 mm



**14593**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white.  
Depth: 38.5 mm



**09593**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white.  
Depth: 40 mm

# VIEW WIRELESS

## Connected devices



IDEA PLANA NEVE UP

### Connected socket outlet actuators



1-module interchangeable buttons and half-button caps for connected electronic controls



**16493.B**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, white.  
Depth: 39.5 mm



**14593.SL**  
Control device with relay output NO 16 A 100-240 V~ 50/60 Hz, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, Silver.  
Depth: 38.5 mm



**09593.CM**  
Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring instant power and load cut-off threshold, Carbon Matt.  
Depth: 40 mm

### Connected retrofit actuator



**03981**  
Control device, with NO relay output 100-240 V 50/60 Hz for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, remote control, 1 input for wired control to recall a scenario, Bluetooth® wireless technology for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)

### Connected energy meter



**02963**  
Device for consumption meter/production of instantaneous electricity and consumption logs (with hourly, daily, monthly, annual resolution), 1 input for toroidal current sensor supplied, detectable power 25 W-100 kW, single-phase power supply 100-240 V 50/60 Hz, Bluetooth® wireless technology for View Wireless mesh system, occupies 1 module measuring 17.5 mm

### Connected thermostats



**02973**  
Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, grey - 2 modules.  
To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723.  
Depth: 28.5 mm



**02973.B**  
Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, white - 2 modules.  
To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723.  
Depth: 28.5 mm



**02973.N**  
Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, Next - 2 modules.  
To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723.  
Depth: 28.5 mm



**02973.M**  
Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, Metal - 2 modules.  
To be completed with Eikon, Arké, Plana cover plates. For Idea, can be installed using the dedicated mounting frame 16723.  
Depth: 28.5 mm

# VIEW WIRELESS

## Connected devices



EIKON LINEA ARKÉ

### Connected thermostats



**30810.G**

Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, black - 2 modules.  
To be completed with Linea cover plates.  
Depth: 31.8 mm



**30810.B**

Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, white - 2 modules.  
To be completed with Linea cover plates.  
Depth: 31.8 mm



**30810.C**

Dial thermostat with relay output 5(2) A 240 V~, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for external temperature sensor, 100-240 V~ 50/60 Hz power supply, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, canvas - 2 modules.  
To be completed with Linea cover plates.  
Depth: 31.8 mm



**09473**

Dial thermostat with relay output NO 5(2) A 240 V~, IoT technology on Bluetooth technology 5.0 standard for the creation of VIEW Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, white - 2 modules.  
To be completed with Neve Up cover plates.



**09473.CM**

Dial thermostat with relay output NO 5(2) A 240 V~, IoT technology on Bluetooth technology 5.0 standard for the creation of VIEW Wireless mesh system, 1 input for external temperature sensor, heating and air conditioning in ON/OFF and PID mode, class I temperature control device (contribution 1%) in ON/OFF mode, class IV (contribution 2%) in PID mode, white LED backlighting with brightness control, 100-240 V 50/60 Hz power supply, Carbon Matt - 2 modules.  
To be completed with Neve Up cover plates.

### Connected magnetic contact



**03980**

Magnetic contact for doors and windows, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 input for voltage-free contact, powered by AA LR6 1.5 V batteries (not supplied), white. For use as an accessory of the connected thermostat or, in combination with the IoT gateway, as a sensor for magnetic contact or voltage-free contact input opening/closing notifications

### Connected radar sensors



**20179**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, grey.  
Depth: 40 mm



**30179.G**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, black. Depth: 43.3 mm



**19179**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, grey.  
Depth: 39.5 mm

# VIEW WIRELESS

## Connected devices



EIKON LINEA ARKÉ

### Connected radar sensors



**20179.B**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 40 mm



**20179.N**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, Next.  
Depth: 40 mm



**30179.B**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 43.3 mm



**30179.C**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, canvas. Depth: 43.3 mm



**19179.B**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 39.5 mm



**19179.M**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, Metal. Depth: 39.5 mm

IDEA PLANA NEVE UP

### Connected radar sensors



**16629**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, grey. Depth: 38.1 mm



**16629.B**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 38.1 mm



**14179**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 39 mm



**14179.SL**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, Silver. Depth: 39 mm



**09179**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, white. Depth: 39.9 mm



**09179.CM**

UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, Carbon Matt. Depth: 39.9 mm

# VIEW WIRELESS

## Connected devices



EIKON      LINEA      ARKÉ

### Connected radar sensors



**02692**  
UWB radar sensor, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 solid state output for extra low voltage controls (SELV and non SELV), 1 input for external push button for output activation or to recall a scenario, 100-240 V 50/60 Hz power supply, false ceiling installation



**02692.S.1**  
Round section adaptor for ceiling installation of the IoT connected radar sensor 02692

### Connected access control



**20462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, grey - 2 modules.  
Depth: 32 mm



**30812.G**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, black - 2 modules.  
Depth: 33.8 mm



**19462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, grey - 2 modules.  
Depth: 31.7 mm



**20462.B**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules. Depth: 32 mm



**30812.B**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules. Depth: 33.8 mm



**19462.B**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules. Depth: 31.7 mm



**20462.N**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, Next - 2 modules.  
Depth: 32 mm



**30812.C**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, canvas - 2 modules.  
Depth: 33.8 mm



**19462.M**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, Metal - 2 modules.  
Depth: 31.7 mm

# VIEW WIRELESS

## Connected devices



IDEA      PLANA      NEVE UP

### Connected radar sensors



**14462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 31 mm



**09462**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 32.5 mm



**14462.SL**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, Silver - 2 modules.  
Depth: 31 mm



**09462.CM**  
NFC/RFID smart card landing reader, card configuration using View Wireless App, Bluetooth technology standard, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 DND input, LED with brightness control, 100-240 V~ 50/60 Hz power supply, Carbon Matt - 2 modules. Depth: 32.5 mm

# VIEW WIRELESS

## Connected devices



### EIKON LINEA ARKÉ

#### Connected access control



**20467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, grey - 2 modules.  
Depth: 31 mm



**30813.G**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, black - 2 modules.  
Depth: 34.3 mm



**19467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, grey - 2 modules.  
Depth: 31 mm



**20467.B**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 31 mm



**30813.B**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 34.3 mm



**19467.B**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 31 mm



**20467.N**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, Next - 2 modules.  
Depth: 31 mm



**30813.C**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, canvas - 2 modules.  
Depth: 34.3 mm



**19467.M**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, Metal - 2 modules.  
Depth: 31 mm

### IDEA PLANA NEVE UP

#### Connected access control



**14467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 31 mm



**09467**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, white - 2 modules.  
Depth: 32.5 mm



**14467.SL**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, Silver - 2 modules.  
Depth: 31 mm



**09467.CM**  
NFC/RFID smart card reader pocket for installation inside the room, IoT technology on Bluetooth® wireless technology 5.0 standard for the creation of View Wireless mesh system, 1 relay output NO 16 A 100-240 V~ 50/60 Hz, 1 configurable input, 100-240 V~ 50/60 Hz power supply, Carbon Matt - 2 modules.  
Depth: 32.5 mm

# VIEW WIRELESS

## Connected devices



### EIKON LINEA ARKÉ

#### Connected access control



**20467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, grey - 2 modules



**19467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, grey - 2 modules



**20467.C.B**  
Card holder cover for NFC/RFID reader pocket and badge switch, white - 2 modules



**19467.C.B**  
Card holder cover for NFC/RFID reader pocket and badge switch, white - 2 modules



**20467.C.N**  
Card holder cover for NFC/RFID reader pocket and badge switch, Next - 2 modules



**19467.C.M**  
Card holder cover for NFC/RFID reader pocket and badge switch, Metal - 2 modules

### IDEA PLANA NEVE UP

#### Connected access control



**14467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, white - 2 modules



**09467.C**  
Card holder cover for NFC/RFID reader pocket and badge switch, white - 2 modules



**14467.C.SL**  
Card holder cover for NFC/RFID reader pocket and badge switch, Silver - 2 modules



**09467.C.CM**  
Card holder cover for NFC/RFID reader pocket and badge switch, Carbon Matt - 2 modules



**01817**  
Mifare transponder card

# Opportunities for you

**We are a team of professionals** who provide expert support and customized global solutions for automating, connecting and monitoring the entire building while assuring total aesthetic coordination of all visible devices.


**vimar.com** - our on-line service platform, available 24/7. Vimar's know-how at your fingertips.

**Navigate the on-line catalogue**, a detailed database of all our codes with technical drawings, instruction sheets, and product photos.

Go to the **download section** and choose your language:

- **Dedicated catalogues** and **brochures** of our product range, systems and solutions.
- **Video** tutorial section, also available on You Tube channel.

From the homepage go to the **News** to keep yourself updated and to **References** to see our latest **Projects**.

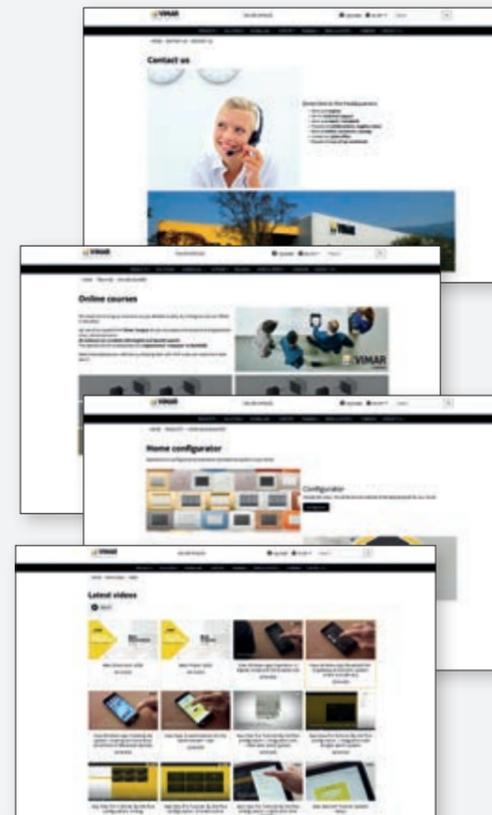

**Energia Positiva.** Insieme

